



Journal Homepage: - [www.journalijar.com](http://www.journalijar.com)

## INTERNATIONAL JOURNAL OF ADVANCED RESEARCH (IJAR)

Article DOI: 10.21474/IJAR01/10452

DOI URL: <http://dx.doi.org/10.21474/IJAR01/10452>



### RESEARCH ARTICLE

#### ASSESSMENT OF AVERAGE ANNUAL EFFECTIVE DOSE AND STUDY OF RADON CONCENTRATION IN DIFFERENT TYPES OF WATER SAMPLES

M. S. A. Khan

Department of Physics, Gandhi Faiz-a-Aam College, Shahjahanpur-(U.P.), India.

#### Manuscript Info

##### Manuscript History

Received: 05 December 2019

Final Accepted: 07 January 2020

Published: February 2020

##### Key words:-

Annual Effect Dose, Cr-39 Detector,  
Radon Concentration, Water Samples

#### Abstract

Radon and its decay products are the main source of natural radiation exposure. Alpha particle emissions of radon in drinking water increase the absorbed dose by the respiratory and gastrointestinal systems, which can lead to cancer. In the present study, annual effective dose and radon concentration measurement has been carried out in four different types of water samples i.e. (mineral water, distilled water, tap water and surface water) in Shahjahanpur city of Uttar Pradesh by using sensitive plastic track detector (CR-39). It is observed that our results are less than the maximum contaminant level of 11Bq/L (300pCi/L) and 1-10mSv/y for annual effective dose for the US Environmental Protection Agency.

Copy Right, IJAR, 2020,. All rights reserved.

#### Introduction:-

Radon is a naturally occurring radioactive gas and highly soluble in water. Radon in water enters the human body by two different paths, Firstly escape from household water and become a source for indoor radon, secondly from drinking water enters directly through the gastro-intestinal (GI) [1]. Most public water supply have very low levels, even if the water comes from municipal wells not be considered a public health concern. This is primarily because such wells tend to tap sand and gravel ground water aquifers with low levels of radon. Public water supplies also stand for a period before they are consumed and some decay of the radon takes place in that time. Radio-nuclides emit "ionizing radiation" when they naturally decay [2]. In 1991, the United States Environmental Protection Agency (EPA) proposed a National Primary Drinking Water Regulation (NPDWR) for  $^{222}\text{Rn}$  with a maximum contaminant level (MCL) of  $11 \text{ Bq L}^{-1}$  ( $300 \text{ pCi L}^{-1}$ ) [3, 4]. The aim of present study is to measure the average annual effective dose and radon concentration in different types of water by sensitive plastic track detector (CR-39).

#### Experimental Technique:-

For the measurement of radon concentration and assessment of average annual effective dose in different types of water (mineral water, distilled water, tap water and surface water) sensitive plastic track detector (CR-39) was used. The Technique to determine the alpha intensity in water samples by CR-39 detector is shown in figure 1. Taking 200 ml from each type of water put in a plastic cup then fixed the plastic detector (CR-39) in the bottom of the cover 5 cm above the surface of the sample as shown in figure 1. Two samples for each type of water were used, and taking the average. When alpha particles strike the CR-39 cause damage tracks. After a period of thirty days 30 days all the detector films are collected and then etched with 2.5N NaOH solutions for a period of 90 minutes at  $60^\circ\text{C}$  in a water-bath. When alpha particles strike the detector films, it creates narrow trails called tracks. The tracks produced by alpha particles in the detector films were counted by using a spark counter. The radon concentration in different types of water was calculated by using the formula [2].

Corresponding Author:- M. S. A. Khan

Address:- Department of Physics, Gandhi Faiz-a-Aam College, Shahjahanpur-(U.P.), India.

$$C_{Rn} = \rho / kT$$

Where,  $C_{Rn}$  is the radon concentration [Bq/m<sup>3</sup>],  $\rho$  is the track intensity [Track/cm<sup>2</sup>],  $k$  is the calibration factor. The calibration factor for  $\alpha$ -tracks is equal to  $0.163 \pm 0.002$  [cm<sup>-2</sup>d<sup>-1</sup> per Bqm<sup>-3</sup>] [5] and  $T$  is the exposure time in hours. The annual effective dose for different types of water was calculated by using the following equation:

$$D \text{ (mSv/y)} = (C_{Rn} \times t \times F \times 8760h) / (170h \times 3700Bqm^{-3})$$

Where,  $C_{Rn}$  is the radon concentration,  $F$  is the equilibrium factor equal 3.88,  $t$  is the fraction of time spent indoors equal 0.4, 170 is the number of hours per working month and 8760 is the number of hours per years [6].

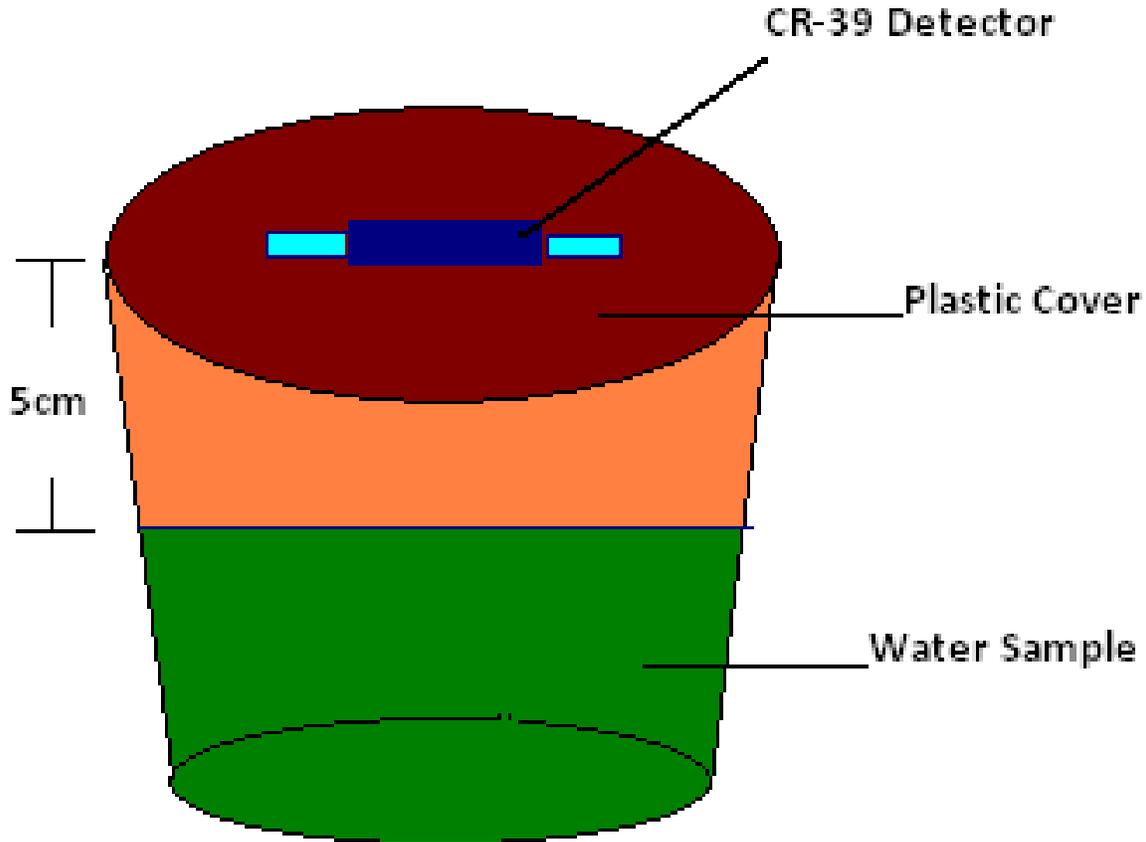


Fig. 1:- Experimental setup to determine the alpha intensity in water by CR-39 detector.

**Results And Discussion:-**

The observed values of radon concentrations and annual effective dose in different types of waters i.e. mineral water, distilled water, surface water and tap water are given in table 1. It is shown that the radon concentration in each type of water are less than the maximum contaminant level for the US Environmental Protection Agency which equal 11 Bq/L and 1-10 mSv/y [7 and 8]. The variation of radon concentration in different types of water samples is shown in figure 2

Table 1:- Observed values of radon concentration in different water sample.

S.No.	Water Samples	Radon concentration (Bq/L)
1	Mineral Water	10.85
2	Distilled water	7.02
3	Surface Water	2.30
4	Tape Water	4.67

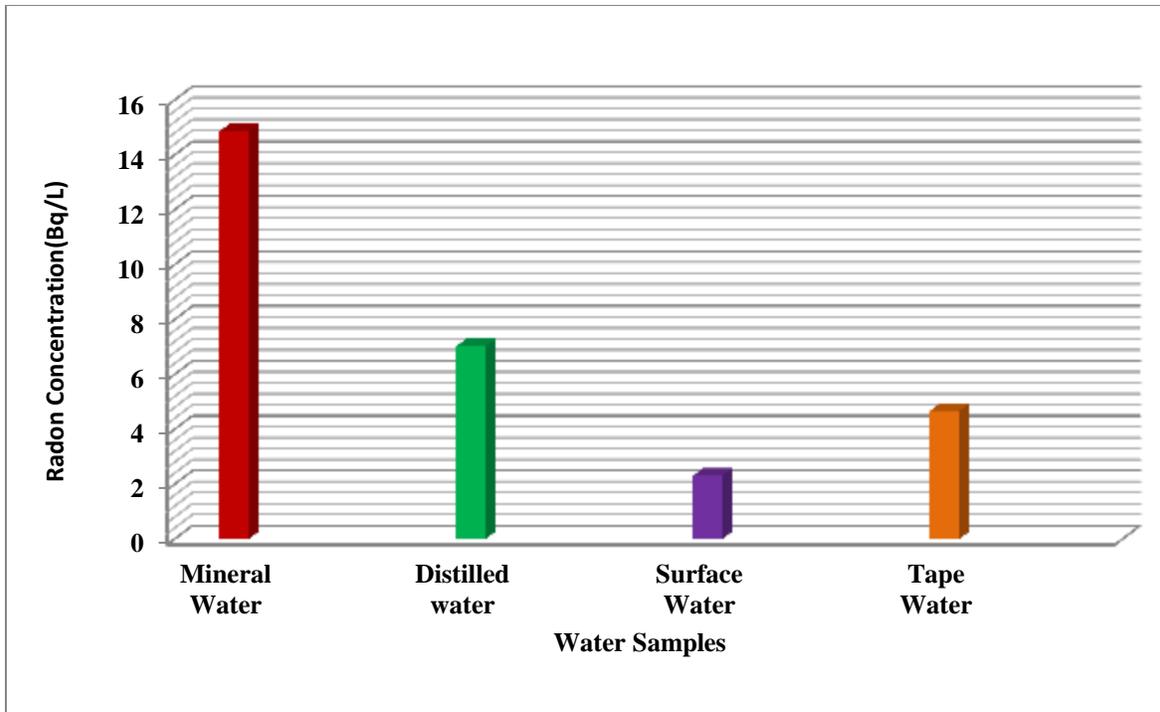


Fig. 2:- Variation of radon concentration in different water samples.

The calculated annual effective dose received by the people from corresponding radon concentration in mineral water, distilled water, surface water and tap water are shown in table 2. It is shown that the average annual effective dose received by the people of the study area in each type of water is blow than the recommended limit of the public of (1-10), mSv/y. The variation of annual effective dose received by the people of the study area in different types of water samples is shown in figure 3.

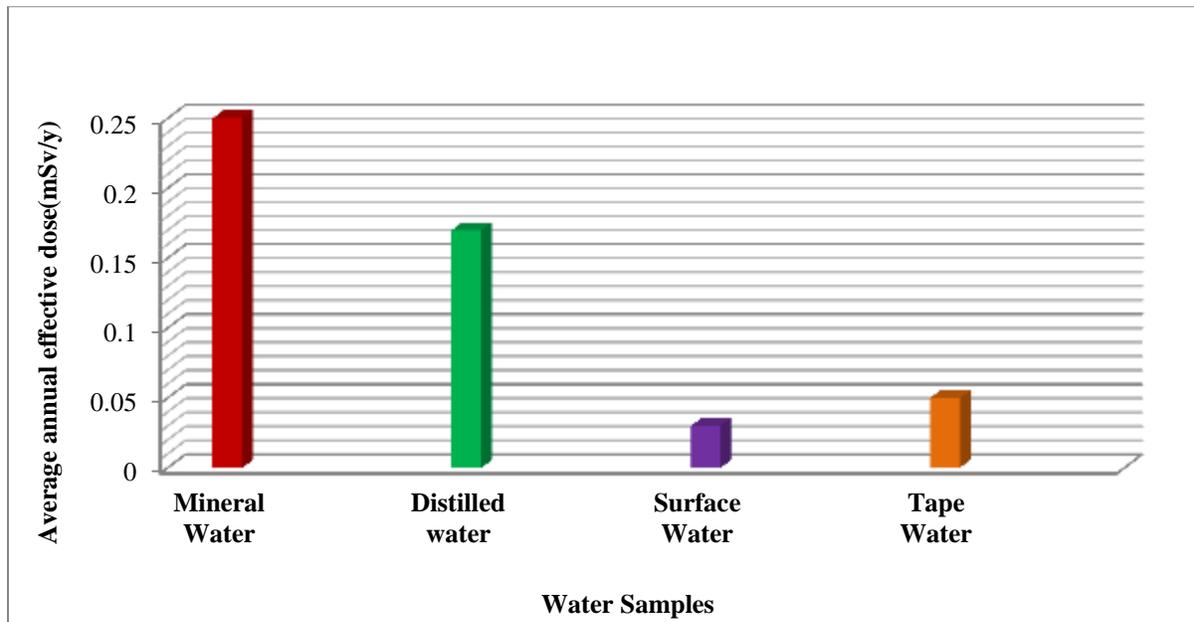


Fig. 3:- Variation of average annual effective dose in different types of water samples.

**Table 2:-** Average value of annual effective dose in different water sample.

S.No.	Water Samples	Average annual effective dose(mSv/y)
1	Mineral Water	0.25
2	Distilled water	0.17
3	Surface Water	0.03
4	Tape Water	0.05

**Conclusion:-**

The radon concentration and average annual effective dose received by the people of the study area in each types of water samples i.e. mineral water, distilled water, surface water and tap water and they have been estimated using a plastic track detector (CR-39). We observed that our results are less than the maximum contaminant level for the US Environmental Protection Agency. Thus different types of water samples in the study area are clear from radiation and safe to use.

**References:-**

1. Tayyeb Z. A., Kinsara A. R. and Farid S.M. (1988). "A study on the Radon Concentrations in Water in Jeddah (Saudi Arabia) and the Associated Health Effects," *Journal of Environmental Radioactivity.*, vol. 38, no. 1, pp.97-10.
2. Maher O. E., Abedalqader A and Shammala A. (2012). "Radioactivity measurements in tap water in Gaza Strip" *Journal of the Association of Arab Universities for Basic and Applied Sciences.*, vol. 11, pp. 21–26.
3. USEPA "United States Environmental Protection Agency (1991). *Federal Register 40 Parts 141 and 142 National Primary Drinking Water Regulations; Radionuclides: Proposed Rule.* U.S. Government Printing Office, Washington, DC.
4. Samer M. A., Rima R. H., Rida Y., Malek C. and Gabriel. K (2007). "Radon measurements in well and spring water in Lebanon," *Radiation Measurements.*, vol 42, pp. 298 – 303.
5. Hayam A and Abdel Ghany (2005). "Variability of Radon Concentrations in different Compartments of Dwellings in Egypt," *Medical Journal of Islamic World Academy of Sciences.*, vol. 15, no. 4, pp. 153-156.
6. Saad F., Abdullah R.M. and Hussein N.A. (2013) "Radon exhalation from Libyan soil samples measured with the SSNTD technique," *Applied Radiation and Isotopes*, vol. 72, pp. 163–168.
7. Barnett J. M., Holbert K. E., Stewart B. D and Hood W. K (1995). "Lung dose estimates from <sup>222</sup>Rn in Arizona groundwater based on Liquid Scintillation measurements," *Health Physics.*, vol 68, pp. 699-703,
8. Yu K.N., Guan Z.J., Stokes M. J and Young E.C.M (1994). "A preliminary study on the radon concentrations in water in Hong Kong and the associated health effects," *Applied Radiation and Isotopes*, vol. 45, pp. 809-81.