

MAGNETOTRANSPORT IMPACT ON SHUNT RESISTANCE IN BIFACIAL c-Si CELLS: A NEAR- SHORT-CIRCUIT ANALYSIS

by Jana Publication & Research

Submission date: 15-Sep-2025 01:34PM (UTC+0700)

Submission ID: 2690338851

File name: IJAR-53816.pdf (1.41M)

Word count: 8086

Character count: 37794

MAGNETOTRANSPORT IMPACT ON SHUNT RESISTANCE IN BIFACIAL c-Si CELLS: A NEAR-SHORT-CIRCUIT ANALYSIS

Manuscript Info

Manuscript History

Received: xxxxxxxxxxxxxxxx

Final Accepted: xxxxxxxxxxxxxx

Published: xxxxxxxxxxxxxxxx

Key words: -

bifacial polycrystalline-silicon solar cell; shunt resistance; magnetic field; carrier-collection velocity; base thickness; illumination mode.

We analyze the influence of a weak magnetic field ($B = 10^{-4}$ to 10^{-3} T) on the shunt resistance R_{sh} of bifacial polycrystalline-silicon solar cells, focusing on the near short-circuit region where the initial slope of the J-V curves sensitively reveals leakage. The device is modeled using a three-dimensional, grain-column approach. The transport equations are solved with diffusivity and diffusion length allowed to depend on B, while base thickness H (100-400 μm) and illumination mode (front, rear, dual) are swept systematically. Joint parameter extraction $\{J_0, n, R_s, R_{sh}\}$ is performed from the J-V characteristics and interpreted using standard experimental

Abstract

indicators (stability of the photocurrent plateau, low-voltage slope, evolution of the open-circuit voltage).

Three key findings emerge. (i) R_{sh} increases with the carrier-collection velocity and, in general, with B, but the magnitude of this change depends strongly on illumination geometry: rear illumination, where photogeneration is far from the junction, is the most sensitive; dual illumination instead yields higher and more stable R_{sh} thanks to bilateral injection that “seals” micro-leakage paths. (ii) Base thickness is a decisive lever: thinning toward $\sim 100 \mu\text{m}$ tends to raise R_{sh} when surface passivation is effective, whereas a thicker base lengthens diffusion paths and amplifies the impact of surface/bulk defects and grain boundaries, especially under rear illumination. (iii) The field dependence is consistent with a magnetotransport mechanism: Lorentz-force deflection reduces effective mobility and diffusivity, modifies the low-voltage slope, and can increase the “apparent” R_{sh} extracted from J-V data.

Practically, the resulting maps $R_{sh}(e.B)$ provide design targets (thickness and passivation) and metrology recommendations: prioritize high-quality passivation, exploit bifacial operation to limit leakage, and account for magnetic-field effects during measurements near $V \approx 0$ to avoid misattributing magnetotransport-induced variations to diode parameters. Proposed extensions include assessing temperature effects, field orientation, and 3D reconstruction of leakage networks. This framework clarifies how magnetic environment, geometry, and illumination interact to set the effective leakage landscape in bifacial c-Si devices. By linking near-short-circuit diagnostics to physically grounded transport changes, it delivers actionable guidance for stabilizing R_{sh} and safeguarding performance under realistic operating conditions.

Copy Right, IJAR, 2019,. All rights reserved.

Introduction:-

Bifacial crystalline-silicon (c-Si) photovoltaics have become a mainstream route to higher energy yield, yet their performance still hinges on device geometry (notably base thickness), surface passivation, and parasitic resistances that shape the J – V response under practical operating conditions [1]. While the impacts of series and shunt resistances on efficiency are well documented, through high-voltage slope changes and low-voltage leakage, respectively, the way these parameters evolve with illumination configuration (front, rear, dual) and base thickness remains a central design lever for bifacial cells [2]. In parallel, external magnetic fields can perturb carrier transport via Lorentz-force deflection, reducing mobility and diffusivity and thereby altering carrier collection; such magneto-transport effects have been observed in Si devices and modules, but their implications for the apparent shunt resistance extracted from J – V curves are comparatively underexplored [3].

This work addresses that gap by focusing on the short-circuit neighborhood, where the photocurrent plateau ($\approx J_{sc}$) and the initial J – V slope provide a sensitive window on leakage paths. Using a three-dimensional modeling and extraction framework, we quantify how the shunt resistance R_{sh} depends on base thickness and

magnetic field, $R_{sh}(e, B)$, across the three illumination modes, and relate these trends to injection level, diffusion length, and surface recombination velocities (SRV) [4]. We further place R_{sh} variations in context with the co-evolution of the diode parameters $\{J_0, n\}$ and with the series resistance R_s , leveraging voltage-dependent electroluminescence and lock-in thermography from the literature to interpret the local and distributed nature of leakage [5]. The resulting maps of $R_{sh}(e, B)$ and their physical interpretation provide actionable guidance for selecting thickness/passivation targets and for anticipating magnetic-field-induced performance drifts under front, rear, and bifacial operation.

Physical Model and Magnetic Parameters .1

i) Description of the Simulated Solar Cell

The analysis employs a three-dimensional columnar unit cell centered on a single polycrystalline-Si grain. A magnetic field, oriented normal to the junction plane, perturbs carrier transport. In this setting, the effective diffusion coefficient $D^*(B)$ and diffusion length $L^*(B)$ are, respectively:

$$D^*(B) = \frac{D}{1 + (\mu B)^2} \quad (1)$$

$$L^*(B) = \sqrt{D^* \cdot \tau} \quad (2)$$

Where :

1. D : diffusion coefficient in zero magnetic field ($\text{en cm}^2 \cdot \text{s}^{-1}$),
2. μ : charge-carrier mobility ($\text{en cm}^2 \cdot \text{V}^{-1} \cdot \text{s}^{-1}$),
3. B : magnetic flux density (tesla, T)
4. τ : minority-carrier lifetime (s)

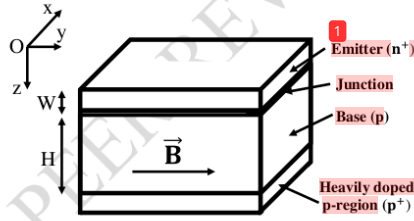


Figure 1. Simulated solar cell model.

As shown above, the bifacial cell is partitioned into four functional zones:

- i) thin n^+ emitter ($\approx 0.5 - 1 \mu\text{m}$),
- ii) the space-charge region (SCR) at the p-n junction,
- iii) a p-type base, and
- iv) a back-surface-field (BSF) layer.

For tractability, photogeneration in the emitter is taken negligible relative to that in the base, and any internal crystalline electric field within the base is disregarded; only the depletion-region field at the junction is retained. A three-dimensional coordinate system is used, with the junction placed at $z = 0$ and its plane defining the origin of (x, y) . The base thickness H is treated as a control parameter in the range $100 - 400 \mu\text{m}$. Under steady illumination, the minority-carrier continuity equation in the base reads:

$$\frac{\partial^2}{\partial x^2} \delta(x, y, z) + [1 + (\mu B)^2] \frac{\partial^2}{\partial y^2} \delta(x, y, z) + \frac{\partial^2}{\partial z^2} \delta(x, y, z) - \frac{\delta(x, y, z)}{L^{*2}} = - \frac{G(z)}{D^*} \quad (3)$$

44 In this notation, D^* is the diffusion coefficient and L^* the diffusion length. The depth-dependent
 45 generation rate $G(z)$ is given by (4):

$$G(z) = n \sum_{i=1}^3 a_i e^{-b_i z} \quad (4)$$

46 a_i and b_i are coefficients obtained from modeling the photogeneration rate under the standard AM1.5
 47 solar spectrum; n denotes the illumination level in suns.

48 The continuity equation then admits the general solution (5):

$$\delta(x, y, z) = \sum_j \sum_k Z_{j,k}(z) \cos C_j x \cos C_k(B)y \quad (5)$$

49 with :

$$C_k(B) = \frac{C_k}{C(B)} \quad (6)$$

50 By applying the boundary conditions at the grain boundaries, the coefficients C_k and C_j are determined as:

$$\left. \frac{\partial}{\partial x} \delta(x, y, z) \right|_{x=\pm \frac{g_x}{2}} = \mp \frac{S_g}{2D^*} \delta\left(\pm \frac{g_x}{2}, y, z\right) \quad (7)$$

$$\left. \frac{\partial}{\partial y} \delta(x, y, z) \right|_{y=\pm \frac{g_y}{2}} = \mp \frac{S_g}{2D^*} \delta\left(x, \pm \frac{g_y}{2}, z\right) \quad (8)$$

51 Define S_g as the recombination velocity at grain boundaries. Enforcing the boundary conditions on the
 52 transport equations yields two transcendental relations from which C_k and C_j are obtained, via graphical
 53 root finding or a numerical solver, namely:

$$\tan C_j \frac{g_x}{2} = \frac{1}{C_j} \times \frac{S_g}{2D^*} \quad (9)$$

$$\tan C_k(B) \frac{g_y}{2} = \frac{1}{C_k(B)} \times \frac{S_g}{2D^*} \quad (10)$$

54 Upon substitution of the general solution, the continuity equation becomes:

$$\frac{\partial^2}{\partial z^2} Z_{j,k}(z) - \frac{Z_{j,k}(z)}{L_{j,k}^{*2}} = -\frac{G(z)}{D_{j,k}^*} \quad (11)$$

55 With :

$$\frac{1}{L_{j,k}^{*2}} = C_j^2 + C_k^2 + \frac{1}{L^*{}^2} \quad (12)$$

$$\frac{1}{D_{j,k}^*} = \frac{16 \sin(C_j \frac{g_x}{2}) \sin(C_k(B) \frac{g_y}{2})}{D^* [C_j g_x + \sin(C_j g_x)] [C_k(B) g_y + \sin(C_k(B) g_y)]} \quad (13)$$

56 With $L_{j,k}^*$ and $D_{j,k}^*$ representing, respectively, the effective diffusion length and coefficient, Eq. (11) can be
 57 solved to give:

$$Z_{j,k}(z) = A_{j,k} \sinh \frac{z}{L_{j,k}^*} + B_{j,k} \cosh \frac{z}{L_{j,k}^*} + \sum_{i=1}^3 k_i e^{-b_i z} \quad (14)$$

58 With :

$$k_i = -\frac{n}{D_{j,k}^* b_i^2 L_{j,k}^{*2} - 1} \quad (15)$$

The constants $A_{j,k}$ and $B_{j,k}$ are fixed by enforcing the junction and rear-surface boundary conditions as follows:

$$D^* \frac{\partial}{\partial z} \delta(x, y, z) = S_f \delta(x, y, z) \quad \text{for } z = 0 \quad (16)$$

$$D^* \frac{\partial}{\partial z} \delta(x, y, z) = -S_b \delta(x, y, z) \quad \text{for } z = H \quad (17)$$

L and S_f be the effective front-surface recombination velocity, decomposed into an intrinsic junction part and a load-induced part:

$$S_f = S_{f0} + S_{fj} \quad (18)$$

S_{f0} denotes the intrinsic junction term associated with the leakage pathway (shunt resistance R_{sh}) at the junction [6,7], whereas S_{fj} represents the carrier flux imposed by the external load and therefore sets the operating point of the cell [6,7].

The parameter S_b corresponds to the effective recombination velocity at the rear surface of the solar cell. Assessing the impact of an external magnetic field on the photovoltage in polycrystalline silicon is key to performance optimization: through the Lorentz force acting on electrons and holes, the field perturbs carrier trajectories and generally shortens the effective diffusion length, an effect that is especially pronounced for long carrier lifetimes [6]. The resulting change in photovoltage depends on device geometry and illumination scheme (front, rear, or bifacial).

In our numerical framework, we solve the standard semiconductor transport equations while allowing D and L to depend on the magnetic field B , consistent with device physics [1,8] and magnetotransport formulations reported in [7]. Surface-passivation effects are not modeled explicitly in this approximation and are assumed to play a negligible role in carrier collection [9].

Before presenting the main results, we specify the field-intensity window over which magnetic effects become appreciable: Figures 2 and 3 plot $D(B)$ and $L(B)$, respectively, thereby defining the operational range used in the subsequent simulations [7].

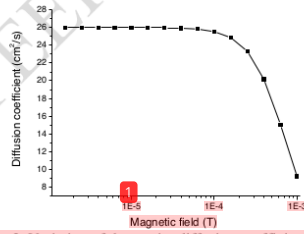


Figure 2. Variation of the carrier diffusion coefficient with magnetic field intensity.

For magnetic fields $B \lesssim 10^{-4} T$, the diffusion coefficient remains nearly constant at $\sim 25 \text{ cm}^2 \text{ s}^{-1}$. Beyond this threshold, D drops sharply to $\sim 10 \text{ cm}^2 \text{ s}^{-1}$, consistent with a pronounced reduction in mobility μ via the Einstein relation $D = (kT/q)\mu$.

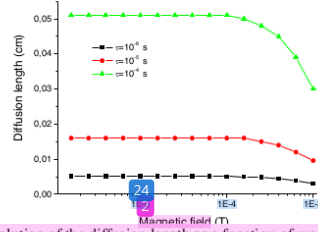


Figure 3. Evolution of the diffusion length as a function of magnetic field, for different carrier lifetimes.

Since $L = D\tau$, longer carrier lifetimes τ naturally produce larger diffusion lengths. For magnetic flux densities $B \lesssim 10^{-4} T$, however, L is essentially unchanged; a noticeable decrease appears only once B exceeds this $\sim 10^{-4} T$ threshold, with the strongest effect observed for long-lived carriers. These observations define the parameter window used here: we center on $B = 10^{-4} T$, where variations in mobility and diffusivity, and thus in photovoltage, are resolvable. Below $10^{-4} T$, magnetic perturbations stay within numerical scatter and lead to negligible shifts in V_{ph} ; in the range 10^{-4} to $10^{-3} T$, the field is sufficient to reveal the coupling between magnetic perturbations and transport. Accordingly, the following simulations examine the combined influence of B and base thickness on the photovoltage, using this interval to quantify the device's magnetic susceptibility and to anticipate possible performance drifts under realistic industrial or environmental conditions.

Expression of the photogenerated current density J_{ph} ($A \cdot \text{cm}^{-2}$) .ii

For an illumination configuration $m \in \{\text{Front}, \text{Rear}, \text{Dual}\}$ a general form for J_{ph} is:

$$J_{ph,m} = \frac{qD^*}{g_x g_y} \int_{-\frac{g_x}{2}}^{\frac{g_x}{2}} \int_{-\frac{g_y}{2}}^{\frac{g_y}{2}} \left[\frac{\partial}{\partial z} \delta_m(x, y, z) \right]_{z=0} dx \cdot dy$$

Where :

- $J_{ph,m}$: photogenerated current density for illumination mode mmm (in $A \cdot \text{cm}^{-2}$),
- q : elementary charge of the electron ($1.602 \cdot 10^{-19} \text{ C}$),
- D^* : effective diffusion coefficient under the influence of the magnetic field (cm^2/s),
- g_x, g_y : lateral dimensions of the simulation domain along the x and y directions (in cm),
- $\delta_m(x, y, z)$: excess minority carrier density induced by optical generation for mode m,
- $\left[\frac{\partial}{\partial z} \delta_m \right]_{z=0}$: derivative of the excess carrier density evaluated at the junction plane ($z = 0$).

Expression of the photovoltage (in V) .iii

For any illumination mode $m \in \{\text{Front}, \text{Rear}, \text{Dual}\}$, the photovoltage can be written as:

$$V_{ph_m} = V_T \ln \left(1 + \frac{1}{n_0} \int_{-\frac{g_x}{2}}^{\frac{g_x}{2}} \int_{-\frac{g_y}{2}}^{\frac{g_y}{2}} \delta_m(x, y, 0) dx dy \right) \quad (19)$$

109 With

$$V_T = \frac{KT}{q} \quad (20)$$

110 And

$$n_0 = \frac{n_i^2}{N_b} \quad (21)$$

111 where :

- 112 1). $V_{ph,m}$: Photovoltage for illumination mode m (in V),
- 113 2). V_T : Thermal voltage
- 114 3). K : Boltzmann constant
- 115 4). T : Absolute temperature (K)
- 116 5). q : elementary charge of the electron ($1.602 \cdot 10^{-19}$ C),
- 117 6). n_0 : Reference equilibrium minority carrier concentration (cm^{-3})
- 118 7). n_i^2 : Intrinsic carrier concentration squared (cm^{-6})
- 119 8). N_b : Base doping concentration (cm^{-3})
- 120 9). D^* : effective diffusion coefficient under the influence of the magnetic field (cm^2/s),
- 121 10). g_x, g_y : lateral dimensions of the simulation domain along the x and y directions (in cm),
- 122 11). $\delta_m(x, y, z)$: excess minority carrier density induced by optical generation for mode m,
- 123 12). $\left[\frac{\partial}{\partial z} \delta_m \right]_{z=0}$: derivative of the excess carrier density evaluated at the junction plane ($z = 0$).

Figure 4 shows the photocurrent density as a function of photovoltage under front-side illumination, with the other parameters held constant. The circled area highlights the nearly horizontal part of the curve, essentially insensitive to photovoltage, near short-circuit ($V \approx 0V$). This plateau appears in the same way on all curves obtained with other parameter sets, regardless of the illumination mode. In this regime the cell behaves like a current source: the delivered current remains almost constant and corresponds to the short-circuit photocurrent density J_{sc} . Since a solar cell is not ideal, a residual leakage current is present; typically small for good-quality devices, it is modeled by a shunt resistance R_{sh} representing an internal leakage path. The corresponding equivalent electrical circuit for operation in this regime is shown in Figure 5.

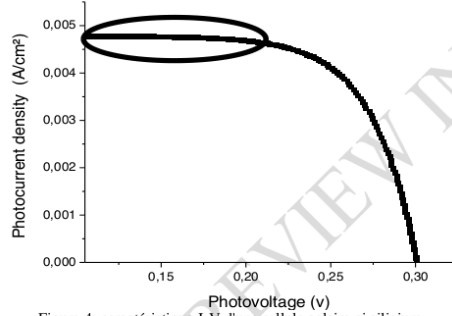


Figure 4: caractéristique J-V d'une cellule solaire au silicium

Figure 5 presents the equivalent electrical circuit of a silicon solar cell operating in the short-circuit regime.

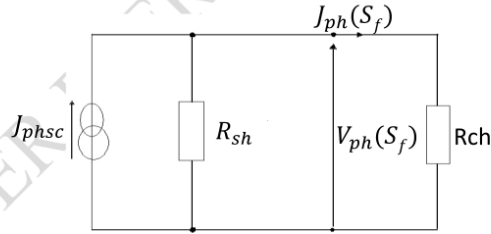


Figure 5: equivalent electrical circuit of the solar cell under short-circuit conditions

J_{phsc} : short-circuit current density

R_{sh} : series resistance

J_{ph} : photocurrent

V_{ph} : photovoltage

R_{ch} : very small load resistance

Figure 5 shows an equivalent electrical circuit of a photovoltaic cell under short-circuit conditions.

Applying Kirchhoff's current law to this circuit gives:

$$V(S_f) = R_{sh}(I_{sc} - I_{ph}(S_f)) \quad (22)$$

147 From this expression, the shunt resistance follows and can be written as:

$$R_{sh} = \frac{V(S_f)}{I_{sc} - I_{ph}(S_f)} \quad (23)$$

148 RESULTS AND DISCUSSION .2

149 This study examines bifacial polycrystalline-silicon solar cells subjected to a modest magnetic flux
 150 density $B = 10^{-4}$ to 10^{-3} T. Our analysis concentrates on operation near short circuit, where we
 151 quantify the short-circuit photocurrent density J_{sc} and the shunt resistance R_{sh} as functions of the carrier-
 152 collector velocity (CCV), the base thickness H ($100 - 400 \mu m$), and the illumination configuration
 153 (front, rear, or bifacial). Figures 6 and 7 plot the $J - V$ characteristics in the vicinity of $V \approx 0$ for $H =$
 154 $100 \mu m$ and $H = 300 \mu m$, respectively, under different B . In this low-voltage window, the plateau value
 155 as $V \rightarrow 0$ provides J_{sc} , while the initial slope of the curve yields an area-normalized estimate of the shunt
 156 resistance via:

$$R_{sh,eff} \approx \left| \frac{dV}{dJ} \right|_{V \rightarrow 0}.$$

157 This representation isolates leakage-path effects (through R_{sh}) from photogeneration-limited current flow,
 158 enabling a clean comparison of how CCV, base thickness, illumination mode, and the applied field B
 159 influence near-short-circuit behavior.

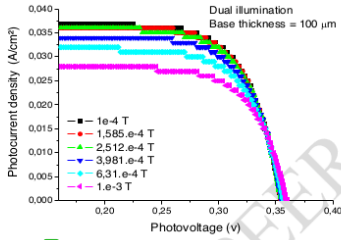


Figure 6: Photocurrent density as a function of photovoltage for different magnetic-field values

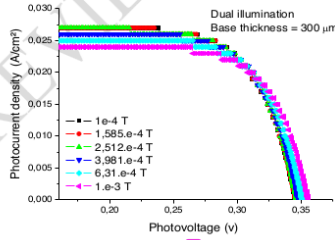


Figure 7: Photocurrent density as a function of photovoltage for different magnetic-field values

160 Under dual illumination, the $J_{ph} - V_{ph}$ curves for $H = 100 \mu m$ (Fig. 6) and $H = 300 \mu m$ (Fig. 7), as
 161 the magnetic field B increases from 10^{-4} to 10^{-3} T, show:

- 162 i) a drop in short-circuit photocurrent density that is more pronounced for the thinner base ($\sim 27\%$)
 163 than for the thicker base ($\sim 11\%$), with the highest initial value observed for $H = 100 \mu m$
 164 ($J_{sc} \approx 0.037 A \cdot cm^{-2}$); and
- 165 ii) a slight increase in the open-circuit photovoltage beyond 0.35 V, while at low V_{ph} the plateau
 166 $J_{ph} \approx J_{sc}$ persists before the rapid fall to zero at V_{oc} . This behavior is attributed to Lorentz-force
 167 deflection of carriers, which reduces the effective diffusivity D and the diffusion length $L =$
 168 $\sqrt{D \cdot \tau}$, together with transport modifications akin to magnetoresistance that degrade carrier
 169 collection; these trends qualitatively agree with experimental observations and magneto-transport
 170 modeling on Si cells/modules [10, 11, 12]. The stronger attenuation for $H = 100 \mu m$ is
 171 consistent with a magnetic-field-dependent optimum base thickness [13] and, more broadly, with

reports on the influence of base thickness/diffusion path on J_{sc} [4]. Finally, the orientation of B relative to the carrier flux can modulate the magnitude of the degradation [14].

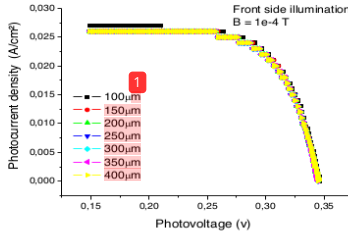


Figure 8: Photocurrent density as a function of photovoltage for various base thicknesses under front-side illumination

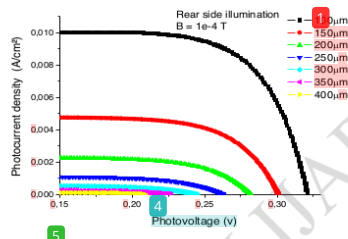


Figure 9: Photocurrent density as a function of photovoltage for various base thicknesses under rear-side illumination

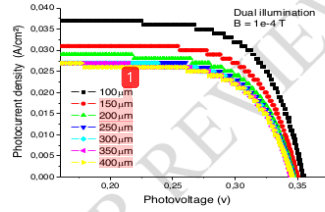


Figure 10: Photocurrent density as a function of photovoltage for various base thicknesses under dual illumination

At $B = 10^{-4} T$, figures 8, 9, and 10 show the $J_{ph} - V_{ph}$ curves for different illumination modes and base thicknesses.

- Front illumination: the influence of thickness is small because the junction is on the illuminated side; as long as the diffusion length exceeds the active base thickness and back-surface reflection lengthens the optical path, carrier collection remains efficient.
- Rear illumination: photogeneration occurs far from the junction; collection then becomes sensitive to the pair (H, L) and to the SRV, so increasing H lengthens the diffusion path, enhances recombination losses, and degrades both J_{ph} and V_{ph} .
- Dual illumination: bilateral generation improves both current and voltage; our data typically give $J_{sc} \approx 0.037 A \cdot cm^{-2}$ and $V_{oc} \approx 0.35 V$, consistent with the bifacial literature [14, 15].

Overall, $H \approx 100 \mu m$ offers the best trade-off, consistent with an optimum thickness governed by surface quality: with low SRV (good passivation), thinning can raise V_{oc} while maintaining a high J_{sc} up to the point where optical losses appear; when SRV are higher, increasing H mainly promotes recombination and penalizes performance [4]. In all three modes, a nearly flat plateau is observed at low V_{ph} ($V_{ph} \approx J_{sc}$), followed by a rapid drop to zero at V_{oc} .

To interpret low-voltage trends (near short circuit) with precision, it is necessary to analyze how the shunt resistance depends on base thickness and, more broadly, on magnetic field, that is, $R_{sh}(H, B)$, via parametric extraction from the $J-V$ curves alongside J_0 and the ideality factor n . Specifically, the initial slope of the $J-V$ trace (around $V \approx 0V$) sets the apparent R_{sh} , which directly impacts J_{sc} and the fill factor; leakage paths associated with surface/bulk defects, grain boundaries, or micro-shunts reduce J_{sc} [2, 16, 17]. From a technology standpoint, good surface passivation (low SRV) increases J_{sc} and suppresses leakage, explaining why base thinning can remain beneficial as long as the diffusion length exceeds the active base thickness. Under magnetic bias, transport modifications (diffusivity D , Lorentz-force-perturbed trajectories) can manifest as a measurable change in the low-voltage slope and thus in the apparent J_{sc} , consistent with the $I-V$ evolutions reported for Si cells/modules under B [10, 12]. In this framework, a robust estimate of $R_{sh}(H, B)$, supplemented by defect-imaging methods (lock-in thermography, voltage-dependent electroluminescence), helps explain the limitation of J_{sc} and FF losses even when V_{oc} is only weakly affected [2, 16].

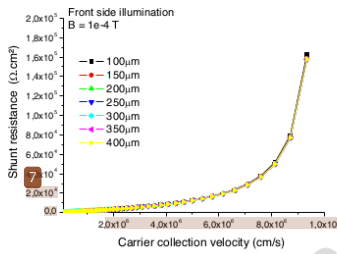


Figure 12: Shunt resistance as a function of carrier collection velocity for various base thicknesses under front-side illumination, with $B = 10^{-4} T$.

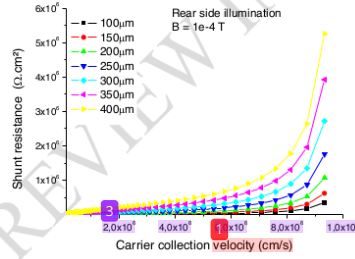


Figure 11: Shunt resistance as a function of carrier collection velocity for various base thicknesses under rear-side illumination, with $B = 10^{-4} T$.

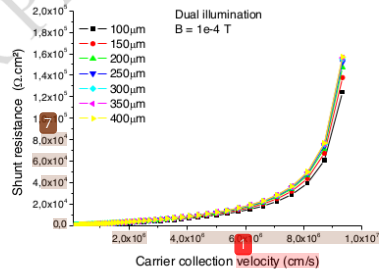


Figure 13: Shunt resistance as a function of carrier collection velocity for various base thicknesses under dual illumination, with $B = 10^{-4} T$.

At $B = 10^{-4}$ T, figures 11, 12, and 13 show how the shunt resistance (R_{sh}) varies with the CCV for several base thicknesses and the three illumination modes. Overall, R_{sh} increases with CCV in all configurations: values reach $\sim 1.6 \cdot 10^5 \Omega \cdot \text{cm}^2$ under front illumination (Fig. 11) and dual illumination (Fig. 13), while rear illumination (Fig. 12) yields higher levels, on the order of $5 \cdot 10^6 \Omega \cdot \text{cm}^2$. The plots can be interpreted in three CCV regimes:

- 10^5 to $2 \cdot 10^6$ cm/s, where all three figures show a similar behavior with an apparent R_{sh} that is very low (near zero) regardless of mode and thickness;
- $2 \cdot 10^6$ to $8 \cdot 10^6$ cm/s, where Figures 11 and 13 display superposed curves and a monotonic rise of R_{sh} for all thicknesses, whereas under rear illumination (Fig. 12) R_{sh} remains nearly zero for $H = 100 - 200 \mu\text{m}$; and
- beyond $8 \cdot 10^6$ cm/s, the superposition persists for Figures 11 and 13, while under rear illumination the curves separate for $H > 200 \mu\text{m}$ and maintain this gap.

Physically, the apparent R_{sh} inferred from the low-voltage slope of the $J - V$ curve depends on injection and illumination geometry: near-junction front or dual illumination raises injection, “seals” leakage paths, and increases R_{sh} ; conversely, when photogeneration is far from the junction (rear) and the base becomes thicker, the diffusion distance and the SRV amplify micro-leakage (surface/bulk defects, grain boundaries), keeping R_{sh} low and then producing thickness-dependent dispersion at high CCV [2, 16, 17]. These observations are consistent with parametric extraction of R_{sh} (together with J_0 , n , and R_s) from $J - V$ characteristics, and with imaging diagnostics (voltage-dependent electroluminescence, lock-in thermography) that reveal the local, distributed nature of leakage paths [2, 16]. In the bifacial context, bilateral generation further explains the higher R_{sh} values observed under dual illumination, in line with recent literature [14, 15].

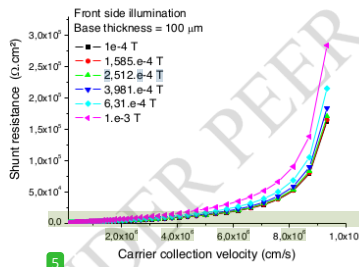


Figure 15: Shunt resistance as a function of carrier-collection velocity for different magnetic-field values B , under front-side illumination, at a base thickness of $e = 100 \mu\text{m}$

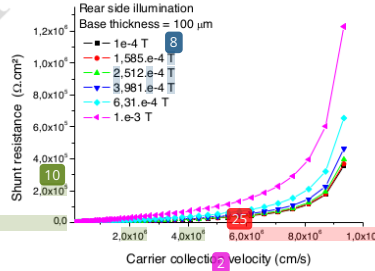


Figure 14: Shunt resistance as a function of carrier-collection velocity for different magnetic-field values B , under rear-side illumination, at a base thickness of $e = 100 \mu\text{m}$

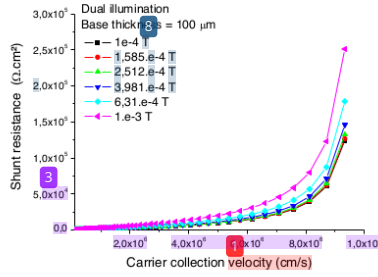


Figure 16: Shunt resistance as a function of carrier-collection velocity for different magnetic-field values B , under dual illumination, at a base thickness of $e = 100 \mu\text{m}$

At $H = 100 \mu\text{m}$, Figures 14, 15, and 16 show how the shunt resistance R_{sh} varies with the CCV for several base thicknesses and for the three illumination modes (front, rear, dual). In all modes, R_{sh} increases monotonically as CCV increases; it also rises with B . We further observe that the values under rear illumination are markedly higher ($\approx 4 \times$) than those measured under front and dual illumination, while the magnetic-field effect is noticeably stronger under rear illumination. This ordering can be explained by the “apparent” nature of R_{sh} extracted at low voltage: when photogeneration occurs far from the junction (rear), the longer diffusion distance and the more influential SRV modulate leakage pathways (surface/bulk defects, grain boundaries), so the low-voltage slope of the $J - V$ curve, and hence R_{sh} , varies more strongly with CCV and B . Conversely, dual illumination raises injection on both sides, “seals” micro-leakage, and yields higher, less B -sensitive R_{sh} values, consistent with parametric extraction of R_{sh} (together with J_0 , n , and R_s) and with electroluminescence/thermography diagnostics that reveal the local, distributed nature of leakage [2, 16]. These trends align with the literature on passivation (low SRV \rightarrow high R_{sh}), the dependence on thickness/diffusion path, and the benefits of bifacial operation, as well as with the effects of magnetic field on transport and magnetoconductivity [10, 12, 14, 15, 18].

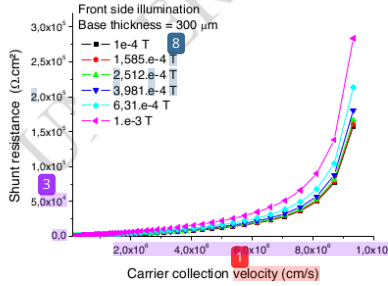


Figure 18: Shunt resistance as a function of carrier-collection velocity for different magnetic-field values B , under front-side illumination, at a base thickness of $e = 300 \mu\text{m}$

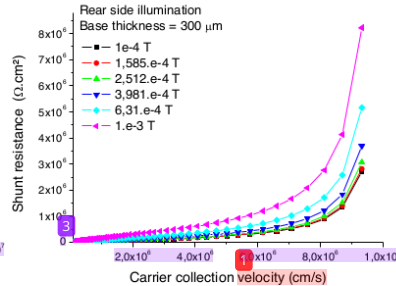


Figure 17: Shunt resistance as a function of carrier-collection velocity for different magnetic-field values B , under rear-side illumination, at a base thickness of $e = 300 \mu\text{m}$



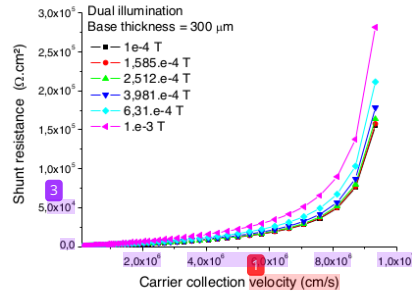


Figure 19: Shunt resistance as a function of carrier-collection velocity for different magnetic-field values B , under dual illumination, at a base thickness of $e = 300 \mu\text{m}$

At $H = 300 \mu\text{m}$, Figures 17, 18, and 19 show how the shunt resistance R_{sh} varies with magnetic field B for the three illumination modes (front, rear, dual). The profiles mirror those of Figures 14–16 (the $H = 100 \mu\text{m}$ case): R_{sh} increases with B regardless of mode. Under front and dual illumination, the levels remain of the same order as at $H = 100 \mu\text{m}$. By contrast, under rear illumination, the values extracted at $H = 300 \mu\text{m}$ are about three times higher than those measured at $H = 100 \mu\text{m}$, which suggests a partial closure of leakage paths and an “apparent extraction” effect linked to the low-voltage slope. Physically, the R_{sh} inferred near $V \approx 0$ reflects the density of micro-shunts and the SRV: effective passivation and/or more homogeneous injection tend to raise R_{sh} , whereas a longer diffusion distance and the presence of surface/bulk defects have the opposite effect [4, 17]. In addition, the magnetic field can modulate injection and local conductivity (magnetoconductivity), inducing measurable changes in the low-voltage slope and thus in the “apparent R_{sh} ” with heightened sensitivity when photogeneration occurs far from the junction (rear illumination) [10, 12, 18]. These observations are consistent with parametric extractions $\{J_0, n, R_s, R_{sh}\}$ from $J - V$ curves, as well as with imaging diagnostics (voltage-dependent electroluminescence, lock-in thermography) that highlight the local and distributed nature of leakage paths [2, 16].

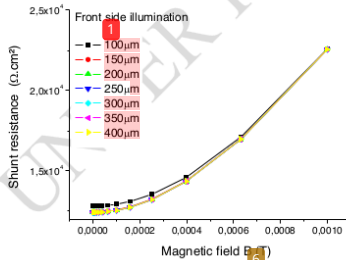

Variation of the Shunt resistance as a function of the magnetic field B for different values of the base thickness under front-side illumination.

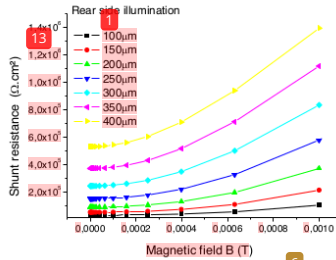

Variation of the Shunt resistance as a function of the magnetic field B for different values of the base thickness under rear-side illumination

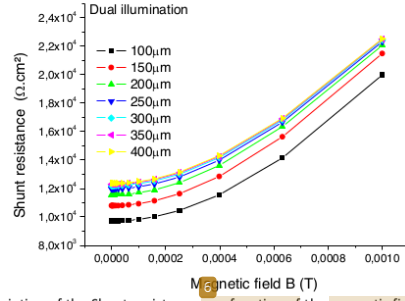


Figure 22: Variation of the Shunt resistance as a function of the magnetic field B for different values of the base thickness under dual illumination.

Under a variable magnetic field B (10^{-4} to 10^{-3} T), figures 20, 21, and 22 show a systematic increase in shunt resistance R_{sh} as B rises, for all illumination modes. The effect is clearly stronger under rear illumination: when the base thickness exceeds $\sim 250 \mu m$, R_{sh} can increase by more than half a decade over the B range considered. Under rear and dual illumination, R_{sh} also increases with base thickness, whatever the value of B . By contrast, under front illumination, a very slight decrease in R_{sh} is observed as thickness increases. This ordering is explained by the “apparent” nature of R_{sh} derived from the low-voltage slope: when photogeneration is far from the junction (rear), the longer diffusion distance and more influential SRV make leakage paths (surface/bulk micro-shunts, grain boundaries) particularly sensitive to B ; magnetoconductivity (Lorentz deflection, reduced mobility and thus reduced effective diffusivity) alters local injection and produces a steeper low-voltage slope, yielding a higher apparent R_{sh} , especially for large thicknesses [10, 12, 18]. In dual illumination, bilateral injection tends to “seal” micro-leakage and raises R_{sh} while mitigating the impact of B ; in front illumination, the proximity of the junction maintains efficient collection, and increasing thickness can raise the likelihood of bulk defects, leading to the small decrease in R_{sh} that is observed. These findings are consistent with parametric extraction methods $\{J_0, n, R_s, R_{sh}\}$ from $J - V$ curves and with imaging diagnostics (voltage-dependent electroluminescence, lock-in thermography) that demonstrate the local and distributed nature of leakage paths [2, 16], as well as with the literature on passivation/thickness and bifacial operation [14, 15].

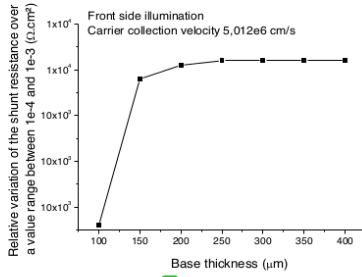


Figure 20: Absolute change in shunt resistance as a function of base thickness over the magnetic-field range $B = 10^{-4}$ to 10^{-3} T, under front-side illumination

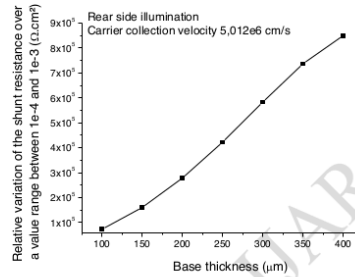


Figure 21: Absolute change in shunt resistance as a function of base thickness over the magnetic-field range $B = 10^{-4}$ to 10^{-3} , under rear-side illumination

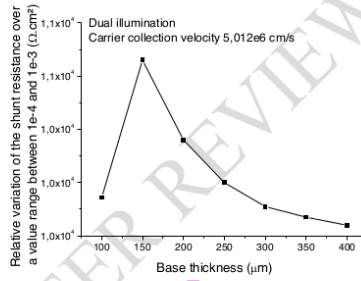


Figure 22: Absolute change in shunt resistance as a function of base thickness over the magnetic-field range $B = 10^{-4}$ to 10^{-3} T, under dual illumination

At $CCV = 5.012 \times 10^6$ cm/s, Figures 23–25 present the relative change in shunt resistance, denoted here as $\Delta_{rel} R_{sh}$, between $B = 10^{-4}$ and 10^{-3} T, as a function of base thickness and illumination mode.

- i) Figures 23 and 25: two regions emerge. In region 1 (100 – 150 μm), $\Delta_{rel} R_{sh}$ increases nearly linearly with thickness. In region 2 (≥ 150 μm), the behaviors diverge: in Figure 23, $\Delta_{rel} R_{sh}$ remains high up to 400 μm, whereas in Figure 25 it gradually decreases toward lower values.
- ii) Figure 24: $\Delta_{rel} R_{sh}$ increases linearly with thickness over the entire interval.

Physically, a high R_{sh} is desirable because it limits leakage and supports both J_{sc} and the fill factor. The observed trends can be attributed to the “apparent” nature of R_{sh} extracted at low voltage: when photogeneration occurs near the junction (front illumination) or (dual illumination), the more uniform injection “seals” micro-shunts and stabilizes the initial J – V slope, yielding a plateau (Fig. 23) or an attenuation (Fig. 25) of $\Delta_{rel} R_{sh}$ at large thickness. By contrast, when generation is far from the junction (rear illumination), the longer diffusion path and more influential SRV increase the sensitivity of the low-voltage slope to leakage paths (surface/bulk defects, grain boundaries), producing a sustained rise

of $\Delta_{rel}R_{sh}$ with thickness (Fig. 24) [14, 15]. Finally, small thickness changes can have a disproportionate effect on R_{sh} when passivation is imperfect or when illumination alters the balance of resistive pathways; hence the value of a joint extraction $\{J_0, n, R_s, R_{sh}\}$ and imaging (voltage-dependent electroluminescence, lock-in thermography) to separate local leakage from extraction artifacts [2, 16, 17].

Conclusion

This study mapped how the shunt resistance, R_{sh} , evolves with base thickness and magnetic field across front, rear, and dual illumination modes, focusing on the low-voltage (near short-circuit) regime where the initial $J - V$ slope sensitively reflects leakage. Three robust trends emerged. First, R_{sh} increases with carrier-collection velocity and generally with magnetic flux density in the range $B = 1 \times 10^{-4}$ to $1 \times 10^{-3} T$, but the magnitude of the change depends strongly on illumination geometry: rear illumination, where photogeneration is far from the junction, exhibits the largest sensitivity, while dual illumination yields the highest and most stable R_{sh} owing to bilateral injection that “seals” micro-leakage pathways [14, 15]. Second, the thickness lever is decisive: thinning toward $\sim 100 \mu m$ tends to raise R_{sh} (provided surface passivation is effective), whereas increasing thickness lengthens diffusion paths, elevates the influence of surface/bulk defects and grain boundaries, and lowers the apparent R_{sh} under rear illumination [4]. Third, the magnetic-field dependence is consistent with magneto-transport arguments, Lorentz-force perturbation of trajectories reduces mobility/diffusivity and modifies the low-voltage slope, so the extracted (apparent) R_{sh} can rise with B , especially when generation is remote from the junction [10, 12, 18].

Methodologically, our results underline the need for joint parameter extraction $\{J_0, n, R_s, R_{sh}\}$ over well-defined voltage windows, complemented by imaging diagnostics (voltage-dependent electroluminescence and lock-in thermography) to distinguish truly local leakage from extraction artefacts in distributed devices [2, 16]. Practically, the maps $R_{sh}(e, B)$ provide actionable guidance for thickness/passivation targets and for operating/measurement protocols:

- i) prioritize high-quality passivation (low SRV) and moderate base thickness to stabilize R_{sh} ;
- ii) leverage dual illumination in bifacial operation to mitigate leakage;
- iii) account for magnetic-field effects, environmental or process-induced, during characterization near $V \approx 0$ so that apparent changes in R_{sh} are not misattributed to diode parameters.

Limitations of this work (idealized passivation in the model, simplified treatment of grain-boundary statistics, and fixed temperature) suggest several extensions: temperature-dependent magnetoconductivity, orientation/angle-of-incidence studies of B , and explicit 3D reconstructions of leakage networks in multicrystalline silicon. Together, these steps would refine the quantitative link between device architecture, magnetic environment, and the stability of R_{sh} in next-generation bifacial c-Si cells.

List Abbreviations:

3D: Three-dimensional
 AM1.5: Standard solar spectrum (air mass 1.5)
 B: Magnetic field (tesla, T)
 BSF: Back Surface Field
 c-Si: Crystalline silicon
 CCV: Carrier-collection velocity ($cm \cdot s^{-1}$)

340 D: Diffusion coefficient ($\text{cm}^2 \cdot \text{s}^{-1}$)
 341 D^* : Effective diffusion coefficient under magnetic field
 342 FF: Fill factor
 343 $G(z)$: Depth-dependent generation rate
 344 H: Base thickness (μm)
 345 J: Current density ($\text{A} \cdot \text{cm}^{-2}$)
 346 J_{ph} : Photocurrent density
 347 J_{sc} : Short-circuit current density
 348 J_0 : Diode saturation current density
 349 L: Diffusion length (μm)
 350 L^* : Effective diffusion length under magnetic field
 351 μ : Carrier mobility ($\text{cm}^2 \cdot \text{V}^{-1} \cdot \text{s}^{-1}$)
 352 n: Diode ideality factor
 353 PV: Photovoltaic
 354 q: Elementary charge of the electron (C)
 355 R_s : Series resistance ($\Omega \cdot \text{cm}^2$)
 356 R_{sh} : Shunt resistance ($\Omega \cdot \text{cm}^2$)
 357 SCR: Space-charge region
 358 S_b : Effective rear-surface recombination velocity
 359 S_f : Effective front-surface recombination velocity
 360 S_{f0} : Intrinsic junction term
 361 S_{ff} : Load-induced front-surface recombination component
 362 S_g : Grain-boundary recombination velocity
 363 SRV: Surface recombination velocity ($\text{cm} \cdot \text{s}^{-1}$)
 364 τ : Minority-carrier lifetime (s)
 365 V: Terminal voltage (V)
 366 V_{oc} : Open-circuit voltage (V)
 367 V_{ph} : Photovoltage (V)

368 Références

- 369 [1] S. M. Sze and K. K. Ng, *Physics of Semiconductor Devices*, 3rd ed. Hoboken, NJ, USA: Wiley, 2006.
 370 [2] Hinken, D. et al., "Series resistance imaging of solar cells by voltage-dependent electroluminescence," *Appl.*
 371 *Phys. Lett.* **91** (2007) 182104. <https://doi.org/10.1063/1.2804562>.
 372 [3] M. TOURE and al., "3D Mathcad Simulation of Photogenerated current density in C-Si Solar Cells Under
 373 Multispectral Illumination: Combined Effect of Transverse Magnetic Field and Base Thickness", *International*
 374 *Journal of Materials Science and Applications* 2025, Vol. 14, No. 4, pp. 172-184
 375 <https://doi.org/10.11648/j.ijmsa.20251404.16>
 376 [4] C. Lin, "The Effect of Thickness and Surface Recombination Velocities on the Performance of Silicon Solar
 377 Cells," *Solids* **6** (2025) 33. <https://doi.org/10.3390/solids6030033>.
 378 [5] Liu, S., Zhang, M., & Wang, X. (2019). Enhanced bifacial solar cell performance through 3D modeling.
 379 *Renewable Energy*, 135, 1427–1434. <https://doi.org/10.1016/j.renene.2018.12.062>
 380 [6] A. Dieng and al., "Determination of the optimal base thickness of an n+–pp+ silicon solar cell under magnetic
 381 field," in *Proc. 24th Eur. Photovoltaic Solar Energy Conf.*, 2009.
 382 [7] M Zougrana and al., "The effect of magnetic field on the efficiency of a silicon solar cell under an intense light
 383 concentration" *Advances in Science and Technology Research Journal* Volume 11, Issue 2, June 2017, pages 133–
 384 138 <https://doi.org/10.12913/22998624/69699>

- [8] D. K. Schroder, Semiconductor Material and Device Characterization, 3rd ed. Hoboken, NJ, USA: Wiley, 2006.
- [9] C. Thiaw et al., "Determination of the optimal base thickness of an n⁺-pp⁺ silicon solar cell under magnetic field," J. Electromagn. Anal. Appl., vol. 12, no. 7, pp. 139–154, 2020 <https://doi.org/10.4236/jemaa.2020.127009>.
- [10] Fathabadi, H. (2020). Magnetic field effect on silicon based solar cells. Materials Chemistry and Physics, 244, 122684. <https://doi.org/10.1016/j.matchemphys.2020.122684>. [ScienceDirect](https://www.sciencedirect.com/science/article/pii/S0254058420302684)
- [11] Combari, D. U. and al. (2018). Performance Investigation of a Silicon Photovoltaic Module under the Influence of a Magnetic Field. Advances in Condensed Matter Physics, 2018, Article ID 6096901. <https://doi.org/10.1155/2018/6096901>. [Wiley Online Library](https://www.wiley.com/doi/10.1155/2018/6096901)
- [12] Ndeto, M. P., Wekesa, D. W., Kinyua, R., & Njoka, F. (2020). Investigation into the effects of the earth's magnetic field on the conversion efficiency of solar cells. Renewable Energy, 159, 184–194. <https://doi.org/10.1016/j.renene.2020.05.143>. [ScienceDirect](https://www.sciencedirect.com/science/article/pii/S0967066420302684)
- [13] Faye, D. et al., "Lamella Silicon Solar Cell under Both Temperature and Magnetic Field: Width Optimum Determination," J. Electromagn. Anal. Appl. 12 (2020) 43–55. <https://doi.org/10.4236/jemaa.2020.124005>.
- [14] T. S. Liang et al., "A review of crystalline silicon bifacial photovoltaic performance characterisation and simulation," Energy Environ. Sci. 12 (2019) 116–148. <https://doi.org/10.1039/C8EE02184H>.
- [15] R. Guerrero-Lemus et al., "Bifacial solar photovoltaics – A technology review," Renew. Sustain. Energy Rev. 60 (2016) 1533–1549. <https://doi.org/10.1016/j.rser.2016.03.041>.
- [16] Breitenstein, O. et al., "Series resistance imaging in solar cells by lock-in thermography," Prog. Photovolt. 13 (2005) 645–660. <https://doi.org/10.1002/pip.623>.
- [17] Tada, K. et al., "What do apparent series and shunt resistances in solar cells really mean?," phys. status solidi (a) 215 (2018) 1800448. <https://doi.org/10.1002/pssa.201800448>
- [18] Sourabié, I.; Zerbo, I.; Zoungrana, M.; Combari, D. U.; Bathiebo, D. J. (2017). Effect of Incidence Angle of Magnetic Field on the Performance of a Polycrystalline Silicon Solar Cell under Multispectral Illumination. Smart Grid and Renewable Energy, 8, 325–335. <https://doi.org/10.4236/sgre.2017.810021>.

MAGNETOTRANSPORT IMPACT ON SHUNT RESISTANCE IN BIFACIAL c-Si CELLS: A NEAR-SHORT-CIRCUIT ANALYSIS

ORIGINALITY REPORT

17%	16%	8%	2%
SIMILARITY INDEX	INTERNET SOURCES	PUBLICATIONS	STUDENT PAPERS

PRIMARY SOURCES

1	ejaet.com Internet Source	8%
2	www.sciencepublishinggroup.com Internet Source	3%
3	hdl.handle.net Internet Source	1%
4	jsaer.com Internet Source	1%
5	Idrissa Sourabié, Mahamadi Savadogo, Boubacar Soro, Ramatou Saré, Christian Zoundi, Martial Zoungrana, Issa Zerbo. "Corrective Effect of the Angle of Incidence of the Magnetic Field Intensity on the Performance (Series and Shunt Resistances) of a Bifacial Silicon Solar Cell", Energy and Power Engineering, 2024 Publication	1%
6	Boubacar Soro, Adama Ouedraogo, Mahamadi Savadogo, Ramatou Konate, Guyserge Tchouadep, Martial Zoungrana, Sié Kam. "Investigation of the Behavior of a Photovoltaic Cell under Concentration as a Function of the Temperature of the Base and a Variable External Magnetic Field in 3D Approximation", Smart Grid and Renewable Energy, 2023 Publication	<1%

7	Internet Source	<1 %
8	www.esfm.ipn.mx Internet Source	<1 %
9	P.D. DeMoulin, M.S. Lundstrom. "Projections of GaAs solar-cell performance limits based on two-dimensional numerical simulation", IEEE Transactions on Electron Devices, 1989 Publication	<1 %
10	Penghui Li, Qingcun Li, Yujian Lai, Shuping Yang, Sujuan Yu, Rui Liu, Guibin Jiang, Jingfu Liu. "Direct entry of micro(nano)plastics into human blood circulatory system by intravenous infusion", iScience, 2023 Publication	<1 %
11	www.journals.pan.pl Internet Source	<1 %
12	aip.scitation.org Internet Source	<1 %
13	ebin.pub Internet Source	<1 %
14	Gokhan Sahin, Ferhat Kaya. "Performance of Capacitance Efficiency on the Extension Space Charge Region of Silicon Solar Cell with Garin Size", Silicon, 2018 Publication	<1 %
15	dyuthi.cusat.ac.in Internet Source	<1 %
16	ete-net.hu Internet Source	<1 %
17	S.N. Singh, P.K. Singh. "Modeling of minority-carrier surface recombination velocity at low-high junction of an n/sup +/-p-p/sup +/- silicon	<1 %

diode", IEEE Transactions on Electron Devices,
1991

Publication

18

[sersc.org](https://www.sersc.org)

Internet Source

<1 %

19

Chu-Hsuan Lin, Li-Cyuan Huang. "The Effect of Thickness and Surface Recombination Velocities on the Performance of Silicon Solar Cell", Solids, 2025

Publication

<1 %

20

Martin Paul Ndeto, David Wafula Wekesa, Robert Kinyua, Francis Njoka. "Investigation into the effects of the earth's magnetic field on the conversion efficiency of solar cells", Renewable Energy, 2020

Publication

<1 %

21

Z. Al-Qodah. "Separation of yeast cells from aqueous solutions using magnetically stabilized fluidized beds", Letters in Applied Microbiology, 12/2006

Publication

<1 %

22

nozdr.ru

Internet Source

<1 %

23

www.repo.uni-hannover.de

Internet Source

<1 %

24

"The Physics of Semiconductor Devices", Springer Nature, 2019

Publication

<1 %

25

Ting-Chun Kuo, Kuo-Yen Huang, Shuenn-Chen Yang, Sean Wu et al. "Monocarboxylate transporter 4 is a therapeutic target in non-small cell lung cancer with aerobic glycolysis-preference", Molecular Therapy - Oncolytics, 2020

Publication

<1 %

Domash, Lawrence, Kevin McCarthy, Qiaoer Zhou, Kadhair Al-Hemyari, Xiaolin Hu, Janice Hudgings, John H. Wohlgemuth, and Kevin Lynn. "", Reliability of Photovoltaic Cells Modules Components and Systems III, 2010.

Publication

<1%

Exclude quotes On

Exclude matches Off

Exclude bibliography On