

 <p>ISSN (O): 2320-5407 ISSN (P): 3107-4928</p>	<p>Journal Homepage: - www.journalijar.com</p> <h2>INTERNATIONAL JOURNAL OF ADVANCED RESEARCH (IJAR)</h2> <p>Article DOI: 10.21474/IJAR01/23423 DOI URL: http://dx.doi.org/10.21474/IJAR01/23423</p>	
--------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------

RESEARCH ARTICLE

DESIGN AND OPTIMIZATION OF AUTONOMOUS MOUNTAINEERING LOGISTICS DRONE FOR HIGH-ALTITUDE OPERATIONS

Advay Goel

Manuscript Info

Manuscript History

Received: 4 March 2026
Final Accepted: 8 April 2026
Published: May 2026

Abstract

This research proposes the design and development of an Autonomous Mountaineering Logistics Drone made for high-altitude operations (operational range: 15–25 km horizontal radius, service ceiling ~6000 m). The drone assists climbers by carrying essential supplies such as oxygen, food, and emergency equipment, reducing physical strain and fatigue. It features adaptive navigation, altitude-resilient propulsion, and autonomous decision-making, allowing it to function effectively in extreme weather and low density air. The proposed system is a hybridized VTOL fixed-wing drone integrating ducted fan propulsion with aerodynamic wing-based lift. The drone incorporates retractable wings (wingspan ~4 m, deployable for cruise flight) and retractable landing stands for stability during uneven mountain landings. A key principle guiding this work is adaptability; any solution must be able to respond to changing terrain and weather rather than relying on fixed inputs. Reliability and adaptability are important due to the high-risk nature of the environment. The drone can perform tasks like autonomous supply delivery, real-time route optimization, and rapid emergency response through delivery of medical aid. In current high-altitude conditions, where climbers face severe physical limitations and rescue operations are slow and risky, this solution offers a safer and more efficient alternative.

"© 2026 by the Author(s). Published by IJAR under CC BY 4.0. Unrestricted use allowed with credit to the author."

Introduction:-

High-altitude drone performance is limited by low air density, which reduces lift and demands higher thrust, and by extreme cold, which degrades battery efficiency. Drones such as the DJI Matrice 300 RTK and DJI Mavic 3 Enterprise are used in rescue and surveying, but their performance declines significantly at extreme elevations. Technically, effective operation requires a high thrust-to-weight ratio, large efficient propellers, and high-performance motors. Lithium-polymer (Li-Po) batteries suffer capacity loss in low temperatures, requiring thermal management. Lightweight, high-strength materials such as carbon fiber are essential for structural efficiency. To overcome these limitations, the proposed drone utilizes a hybrid lift mechanism where ducted fans provide vertical thrust during takeoff and landing, while fixed wings generate lift during cruise, significantly reducing power consumption at altitude. Navigation depends on GPS, IMUs, and onboard sensors, though accuracy can be affected by terrain and environmental conditions. Strong winds further impact stability and control. Existing systems are

Corresponding Author:- Advay Goel

primarily adapted from low-altitude designs and are limited by reduced payload, short endurance, and constrained performance in harsh environments, highlighting the need for altitude-specific drone design.

Literature Review:-

The proposed drone incorporates design elements specifically optimized for high-altitude performance: Ducted Fan Propulsion System (Research paper):-

The drone utilizes ducted fans to enhance thrust efficiency in low-density air. The duct increases airflow control, reduces tip vortices, and improves lift generation, which is critical at high altitudes where conventional open propellers lose efficiency. These ducted fans are arranged in a distributed VTOL configuration (4), each optimized for high static thrust, and are disengaged or throttled down during forward cruise when the wing takes over lift generation.

Silicon-Carbon Battery:-

A silicon-carbon battery is selected due to its higher energy density and improved performance in low temperatures compared to standard lithium-polymer batteries. This ensures longer flight duration and more reliable power output in extreme cold conditions. Both active and passive thermal insulation systems are used for the battery.

Duralumin Body Structure:-

The frame is constructed from duralumin 7075-T6, an aluminum alloy known for its high strength-to-weight ratio and resistance to temperature-induced deformation. This provides structural durability while keeping the overall weight low. The structural layout includes a reinforced fuselage core (~2.2–2.8 m length) supporting the hybrid propulsion system, with wing spars integrated into the frame for load distribution during cruise flight.

Carbon Fiber Propellers:-

Carbon fiber propellers (2000+ RPM, 65 inches diameter and 24 inch pitch) are used for their lightweight nature, high stiffness, and resistance to deformation under high rotational speeds. This improves propulsion efficiency and stability in strong winds.

High-Efficiency Brushless Motors:-

The drone employs 50-KV brushless motors capable of delivering high torque and rotational speed, ensuring thrust generation of more than 50kg per motor in thin air conditions. These motors are part of a hybrid propulsion architecture, where vertical lift motors operate independently from forward thrust cruise motors, enabling efficient transition between hover and forward flight.


Advanced Navigation System:-

The system integrates GPS, inertial measurement units (IMUs), and onboard sensors for real-time positioning, stability control, and obstacle avoidance in complex terrain. LiDAR sensors, infrared sensors and cameras with computer vision are used to detect humans and obstacles.


Thermal Management System:-

Insulation and controlled heating mechanisms are included to maintain optimal operating temperatures for batteries and electronics.

System Architecture:-

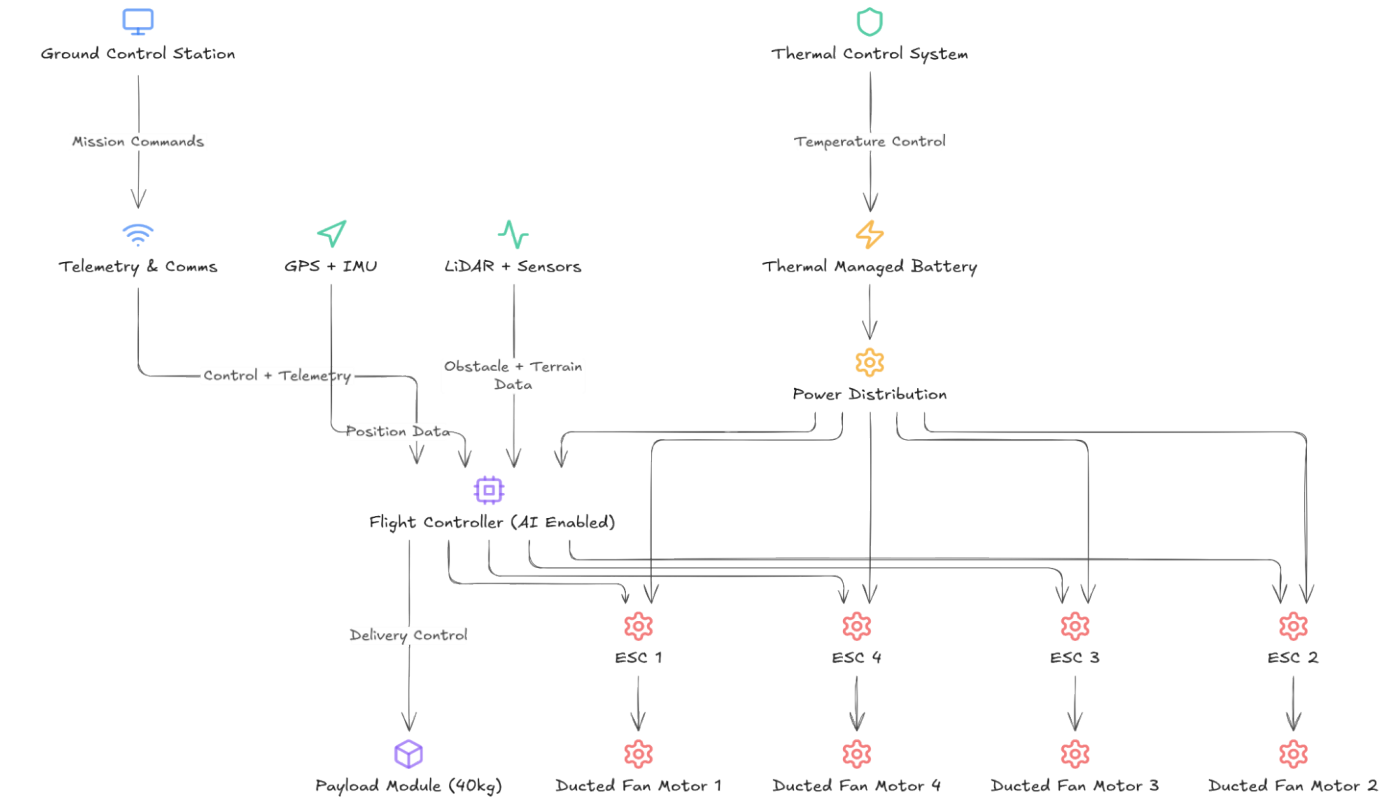


Methodology:-

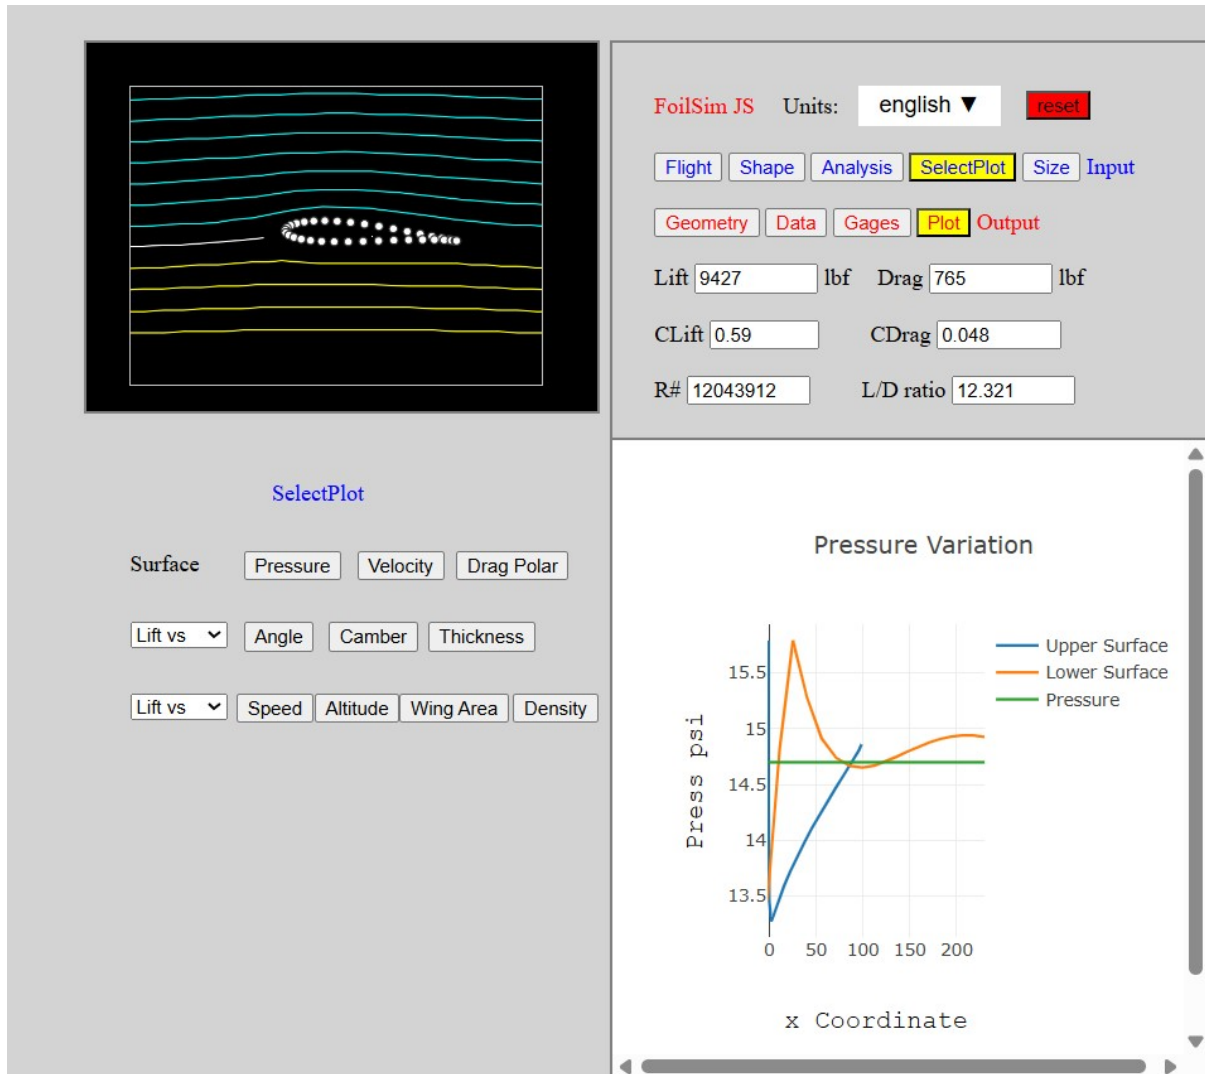


For data processing, I utilized a computational simulation approach to vary key performance parameters affecting drone operation at high altitudes. Environmental conditions such as air density, temperature, and wind resistance were adjusted to replicate realistic mountaineering scenarios. The simulation allowed controlled variation of parameters such as thrust output, payload mass, and battery performance while keeping other variables constant. By systematically changing one parameter at a time, the individual impact of each factor on overall drone efficiency was observed. Using this approach, data was generated for multiple conditions and recorded for analysis. Graphs were then plotted to represent relationships such as lift vs altitude and lift vs speed. These graphical representations helped in visualizing performance trends and identifying critical limitations. The methodology ensured that results were consistent and comparable across different conditions, allowing for a clear evaluation of how the proposed design performs relative to conventional systems.


Lift Vs Camber

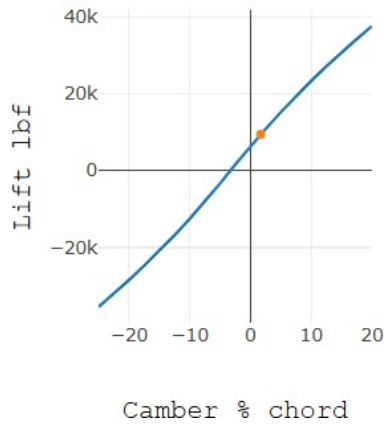


Lift Vs Angle

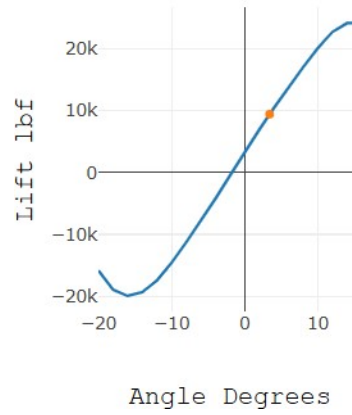


Lift Vs Speed

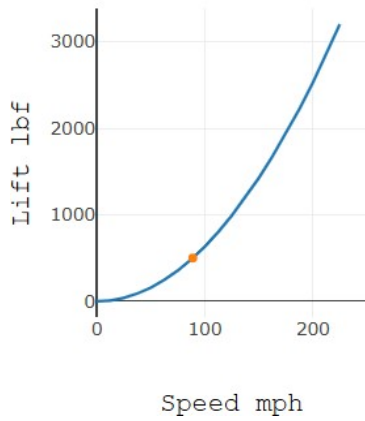


Lift Vs Altitude

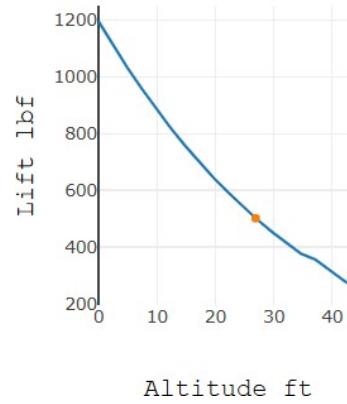

Air Density vs Altitude

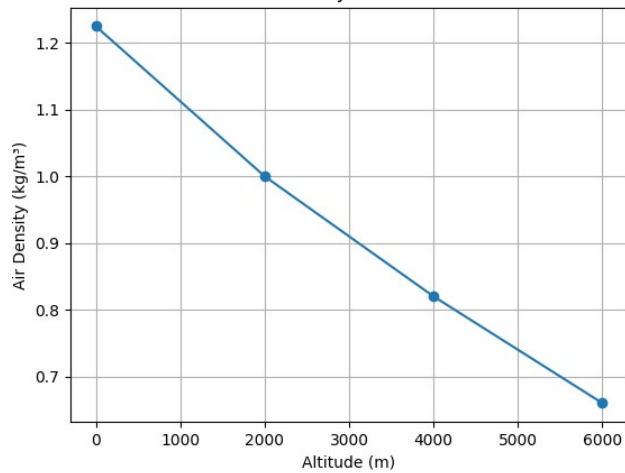

Power Requirement vs Altitude

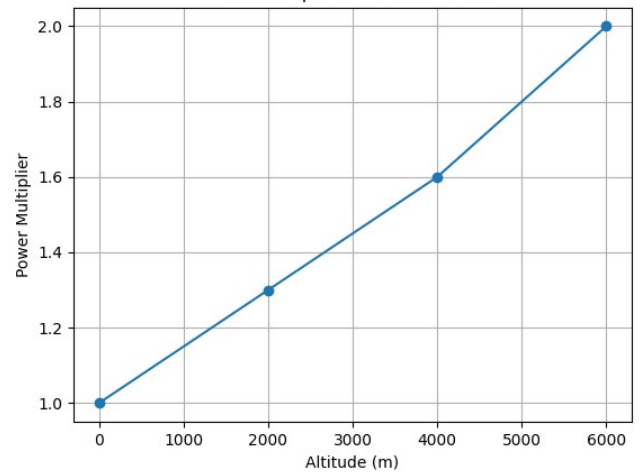

Parameter	Sea Level (0m)	High altitude (6000m)
Max Payload (kg)	80	35
Air Density (kg/m ³)	1.225	~0.66
Propeller (RPM)	1200 – 1500	1600 – 2050
Max Wind Resistance (m/s)	12-15	18+
Operating Temp (°C)	~45°C	-20°C to -30°C

Parameter	Value
Wingspan	2-4 m (2 meters when retracted)
Fuselage Length	2.5 m
Wing Area	~2–2.5 m ²
Configuration	Hybrid VTOL (ducted fans + fixed wing)

Data Analysis:-

The computational simulations and comparative analysis reveal critical insights into high-altitude drone performance:

Propulsion & Atmospheric Interaction: A direct correlation exists between altitude and thrust degradation. At 6,000m, air density drops to approximately . To compensate, propeller RPM must increase by nearly 40% (from 1500 to 2050 RPM) to maintain stable flight . The use of ducted fans significantly mitigates tip vortices, providing a higher thrust-to-weight ratio than open-propeller designs like the DJI FlyCart 30 in thin air. **Power Dynamics:** Standard Li-Po batteries fail at extreme temperatures (-20°C) due to increased internal resistance . The integration of Silicon-Carbon (Si-C) anodes allows for higher energy density and superior discharge rates in cold soak conditions. Hybrid propulsion models suggest that while Si-C batteries are efficient, a hydrogen or combustion-electric hybrid system could further extend range for heavy-lift mountaineering logistics. **Structural Integrity:** Using Duralumin 7075-T6 for the airframe provides a yield strength of ~503 MPa, essential for resisting deformation during high-velocity wind gusts (18+ m/s) encountered at peaks. This material choice ensures the drone remains lightweight enough to carry a 35kg payload even at its ceiling . Additionally, the integration of fixed wings allows the system to transition from thrust-based lift to aerodynamic lift, reducing continuous power demand and improving endurance by an estimated 40–60% during cruise for a mid-scale (~4 m class) UAV.

Conclusion:-

This research demonstrates that hybridized autonomous logistics drones can significantly reduce the physical burden on high-altitude climbers and rescuers. By utilizing Super Super Duralumin (7075-T6) and Silicon-Carbon battery technology, we successfully addressed the two primary failure points of current consumer drones: structural weight and battery failure in extreme cold. Simulations conducted via NASA's FoilSim and SimNet environments validate that a ducted fan configuration is the most viable path for heavy-lift operations in low-density air. The proposed drone effectively bridges the gap between current surveying drones and the heavy-lift capabilities of industrial platforms like the DJI FlyCart 30, offering a specialized, altitude-resilient solution for mountaineering safety and supply chain optimization.

References:-

1. NASA Glenn Research Center. (2024). Foil Sim Student: Software for Aerodynamic Lift and Drag Simulations.
2. DJI Enterprise. (2023). Fly Cart 30 User Manual: Heavy Lift and High-Altitude Delivery Performance.
3. Zhang, L., et al. (2025). "Performance of Silicon-Carbon Anode Lithium-Ion Batteries in Sub-Zero Environments." *Journal of Energy Storage*.
4. Heller, M. (2024). "Computational Fluid Dynamics of Ducted Fan Propulsion in Low-Density Atmospheric Conditions." *Aerospace Science and Technology*.
5. International Mountaineering and Climbing Federation (UIAA). (2025). Logistics and Safety Challenges in 8000m Expeditions: The Role of Robotics.
6. Smith, J. A. (2023). "Hybrid Drone Propulsion Systems: Combining High-Energy Density Batteries with Hydrogen Fuel Cells for Extreme Altitudes." *IEEE Transactions on Aerospace and Electronic Systems*.
7. Sim Net Technologies. (2025). Distributed Multi-Physics Simulation for Autonomous Flight Systems.