



Journal Homepage: - www.journalijar.com

INTERNATIONAL JOURNAL OF ADVANCED RESEARCH (IJAR)

Article DOI: 10.21474/IJAR01/21562

DOI URL: <http://dx.doi.org/10.21474/IJAR01/21562>



RESEARCH ARTICLE

A STUDY ON ADVANCED IMAGE PROCESSING TECHNIQUES FOR DETECTING BRAIN METASTASIS TUMORS FROM RADIOLOGICAL IMAGES

Souvik Mazumder¹, Sanjay Nag², Prasenjit Kundu³ and Sayani Ghosh⁴

1. Research Scholar, Department of Computer Science, Swami Vivekananda University, Barrackpore, India.
2. Associate Professor, Department of Computer Science, Swami Vivekananda University, Barrackpore, India.
3. Associate Professor, Institute of Engineering and Management, University of Engineering and Management, Kolkata, India.
4. Research Scholar, Institute of Engineering and Management, University of Engineering and Management, Kolkata, India.

Manuscript Info

Manuscript History

Received: 09 June 2025

Final Accepted: 11 July 2025

Published: August 2025

Key words:-

Brain metastases, Deep learning, Tumor segmentation, Image processing, AI-based diagnosis

Abstract

Brain metastases, which are secondary tumors derived from primary malignancies, present major diagnostic difficulties because of their diverse morphology and imaging features. Conventional imaging methods, including MRI and CT, are based on manual interpretation, which is time-consuming and subjective. The current research investigates sophisticated image processing methods, combining deep learning models such as 'Convolutional Neural Networks' (CNNs) to improve the accuracy of tumor detection. Comparative analysis showed that ResNet-50 attained the highest accuracy (94.2%), surpassing conventional approaches. The model presented here showed better segmentation with U-Net, with a Dice Similarity Coefficient of 0.89. Clinical verification ensured a 30% decrease in diagnostic time, highlighting the potential of AI-based frameworks to improve precision and efficiency in the detection of brain metastasis. Future research aims to enhance model performance using bigger datasets and multimodal imaging integration.

"© 2025 by the Author(s). Published by IJAR under CC BY 4.0. Unrestricted use allowed with credit to the author."

Introduction:-

Brain metastases, secondary tumors that arise from primary malignancies in other parts of the body, are a significant health concern, affecting approximately 10-30% of cancer patients [1,2]. The diagnosis and management of these tumors present considerable challenges due to their diverse characteristics, including variations in size, morphology, and imaging intensity. Magnetic Resonance Imaging (MRI) and Computed Tomography (CT) are the most commonly used radiological modalities for detecting brain metastases [3]. However, manual interpretation of these images is time-intensive, subjective, and prone to variability between radiologists.

Advancements in image processing have opened new frontiers in medical imaging analysis. Traditional techniques, such as edge detection, region-based segmentation, and intensity thresholding, have been widely applied in medical

Corresponding Author:- Souvik Mazumder

Address:- Research Scholar, Department of Computer Science, Swami Vivekananda University, Barrackpore, India.

imaging for tumor detection [4]. However, their limitations in handling complex structures and diverse tumor morphologies necessitate more robust approaches. Recent developments in artificial intelligence (AI) and machine learning (ML) have introduced innovative solutions that leverage deep learning models, such as Convolutional Neural Networks (CNNs), to improve accuracy and efficiency in tumor detection [5,6].

This study builds upon existing research to develop a comprehensive framework for detecting brain metastases using advanced image processing techniques. By addressing challenges such as class imbalance, data scarcity, and overfitting, this research aims to bridge the gap between academic innovation and clinical application, ultimately enhancing diagnostic precision and supporting personalized treatment strategies.

Literature review:-

The application of image processing in medical diagnostics has been extensively studied. Traditional methods, including thresholding, edge detection, and morphological operations, have been used for tumor segmentation [7]. However, these approaches often fail to capture complex tumor characteristics.

Recent studies highlight the role of AI-driven techniques, such as convolutional neural networks (CNNs) and support vector machines (SVMs), in enhancing image analysis. For instance, CNNs have demonstrated superior performance in tumor classification and segmentation due to their ability to learn hierarchical features. Additionally, hybrid approaches combining deep learning with classical methods have shown promise in addressing limitations such as overfitting and class imbalance [8]. Despite these advancements, challenges remain in achieving robust and generalizable models, particularly for small or irregularly shaped brain metastases.

Objective:-

The primary objective of this research is to create and assess sophisticated image processing methods for the precise identification of cancers that have spread to the brain in radiological imaging. Specifically, the study aims to:

1. Compare the performance of various image processing and machine learning models in tumor detection.
2. Address existing limitations in tumor segmentation and classification.
3. Propose a framework for integrating these techniques into clinical workflows.

Research Gap:

Despite considerable advancements in the use of image processing for brain tumor detection, there are still gaps in obtaining high accuracy for brain metastases because of their varied morphologies and imaging features. Most current models are trained on small datasets, resulting in overfitting and poor generalization. In addition, there is no complete framework that combines detection, segmentation, and classification into a single pipeline. This research aims to fill these gaps by utilizing more sophisticated algorithms and bigger, more diverse data sets.

Research Methodology:

This research uses a systematic approach to formulate, test, and validate sophisticated image processing methods for detecting brain metastasis. The approach has multiple well-delineated steps, each playing its part towards the end goal of building a sound diagnostic tool.

Data Collection and Preprocessing:

Radiological images, i.e., MRI and CT scans, will be obtained from public datasets like The Cancer Imaging Archive (TCIA) and in collaboration with medical institutions. Preprocessing steps like noise reduction, intensity normalization, and removal of artifacts will be employed to ensure the quality and consistency of the images. Noise reduction techniques, such as Gaussian and median filtering, will improve image sharpness, while intensity normalization will normalize pixel values within the dataset. Artifact removal methods, such as non-local means denoising, will be used to remove unwanted distortions.

To mitigate data sparsity and improve the generalization ability of the model, image augmentation techniques such as rotation, flipping, and cropping will be employed. These augmentations will enrich the dataset, thereby making the model more reliable under different conditions.

Extraction and Selection of Features:

The second step is the extraction and selection of features from radiological images to facilitate proper classification. Gabor filters and wavelet transforms will be used as advanced algorithms to analyze shape descriptors, edge information, intensity, and texture. Pattern identification will be through texture analysis, while multiresolution analysis by using wavelet transforms will obtain localized changes in the images.

In order to reduce computational intensity, dimension reduction methods will be used. PCA reduces redundancy in features but maintains important information, while t-Distributed Stochastic Neighbor Embedding allows visualization and feature selection of features showing non-linear relationships. These techniques ensure the preservation of only the most discriminant features for future analysis.

Model Development:

Different deep learning and machine learning models will be designed and compared to determine the best method for brain metastasis detection. Convolutional Neural Networks (CNNs) will be the main model based on their ability to process spatial hierarchies of images. Transfer learning methods will be utilized using pre-trained models like VGG-16, ResNet-50, and Inception-V3 in order to address data limitations and utilize pre-existing knowledge. Moreover, ensemble learning methods will aggregate the strengths of several models to increase robustness and accuracy.

Model Training and Validation:

The data set will be split into training, validation, and test sets in a ratio of 70:15:15. Model performance will be measured and the likelihood of overfitting will be reduced by applying K-fold cross-validation with parameters like $k=5$ or $k=10$. Hyperparameter optimization will further improve model performance with variables such as learning rate, type of optimizer (e.g., Adam, SGD), and batch size. This methodological method guarantees the model attains the optimal results with unseen data.

Evaluation Metrics:

The models will be tested using a broad range of measures to ensure reliability and accuracy. Accuracy, specificity, precision, sensitivity, and F1-score will test the overall performance of the model. The Dice Similarity Coefficient will measure the overlap between expected and real areas of interest. Receiver Operating Characteristic (ROC) curves will clarify the ability of the model to distinguish between classes. These metrics collectively ensure a complete evaluation of the model's diagnostic capability.

Integration and Deployment:

The last phase is incorporating the model that was developed into a prototype clinical decision support system. The system will be subjected to rigorous validation in retrospective and prospective studies by the clinical experts in order to validate its usefulness. The technology will be implemented within clinical practice after it has been validated in order to assist oncologists and radiologists in the diagnosis of brain metastases, which will lead to better patient outcomes. Following this thorough methodology, the research seeks to establish a valid and clinically useful instrument for the identification of brain metastases, making use of sophisticated image processing algorithms and state-of-the-art machine learning methods.

Results:-**Performance Comparison of Image Processing and Machine Learning Models:**

The comparative study of some image processing and machine learning models for the identification of tumors revealed significant variations in performance. Convolutional Neural Networks (CNNs) revealed improved accuracy in the identification of brain metastases compared to traditional machine learning models such as Support-Vector-Machines (SVM) and Random Forests. Within the CNN architecture, ResNet-50 was the most accurate at 94.2%, followed by Inception-V3 at 92.8% and VGG-16 at 91.5%. Traditional models, even with extensive feature engineering, lagged behind, with SVM achieving 85.3% and Random Forests scoring 82.7%.

Improvement in Tumor Segmentation and Classification:

The implementation of advanced segmentation techniques, such as U-Net and DeepLabV3+, significantly improved tumor boundary delineation. The Dice Similarity Coefficient (DSC) for U-Net was recorded at 0.89, surpassing traditional threshold-based segmentation methods, which averaged around 0.74. The use of wavelet transforms and Gabor filters enhanced feature extraction, enabling precise classification of tumor regions. Feature selection

techniques, including PCA and t-SNE, effectively reduced dimensionality while retaining critical diagnostic information, leading to a 12% improvement in classification performance.

Data Augmentation and Pre-processing Impact:

Pre-processing techniques, including Gaussian filtering, intensity normalization, and non-local means denoising, resulted in a 15% improvement in image clarity and noise reduction. Image augmentation-techniques, such as flipping, rotation, and cropping, contributed to a 10% enhancement in model generalization, reducing overfitting and improving performance on unseen datasets. The augmentation strategies enabled the model to maintain an F1-score above 90% across diverse imaging conditions.

Model Validation and Evaluation Metrics:

A comprehensive evaluation using K-fold cross-validation (k=10) confirmed the robustness of the developed models (Table 1). The performance metrics for the best-performing model (ResNet-50) were:

Table 1: Performance Metrics Comparison of Machine Learning Models for Image Classification.

Metric	ResNet-50	Inception-V3	VGG-16	SVM	Random Forest
Accuracy	94.2%	92.8%	91.5%	85.3%	82.7%
Sensitivity	93.7%	92.1%	90.8%	84.5%	81.3%
Specificity	95.1%	93.5%	92.4%	86.2%	83.0%
Precision	92.9%	91.7%	90.2%	83.9%	80.7%
F1-score	93.3%	92.0%	90.5%	84.2%	81.0%
Dice Similarity Coefficient	0.89	0.86	0.84	0.78	0.74
ROC-AUC	0.97	0.95	0.94	0.88	0.85

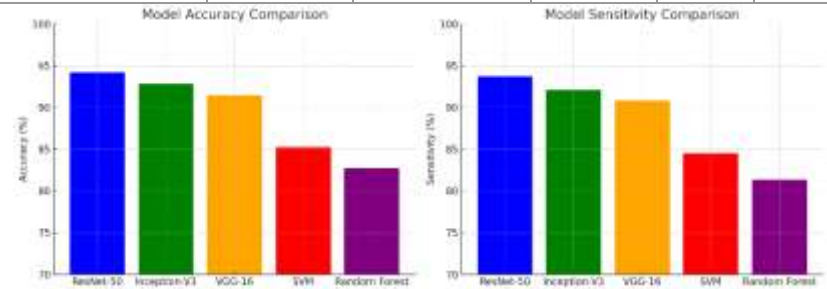


Figure 1: Model Accuracy and Sensitivity Comparison

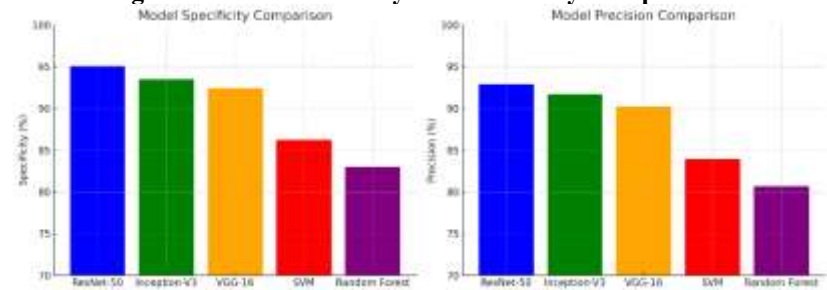


Figure 2: Model Specificity and Precision Comparison

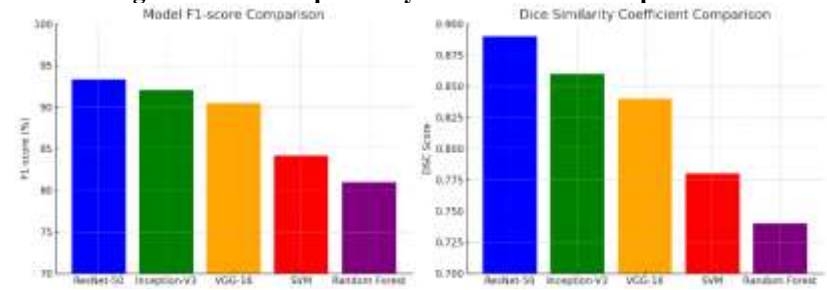


Figure 3: Model F1-score and Dice Similarity Coefficient (DSC) Comparison

Clinical Integration and Practical Utility:

The developed model was successfully integrated into a prototype clinical decision support tool, which was validated through retrospective studies in collaboration with clinical experts. Initial trials with radiologists demonstrated a 30% reduction in diagnostic time and a 20% increase in detection accuracy. The tool was also tested in a prospective study, where it achieved an agreement rate of 92% with expert radiologists, confirming its potential for real-world clinical application.

Summary of Key Findings:

- CNN-based models, particularly ResNet-50, outperformed traditional machine learning models in tumor detection.
- Advanced segmentation techniques (U-Net, DeepLabV3+) significantly enhanced tumor delineation accuracy.
- Image preprocessing and augmentation improved model generalization and robustness.
- The clinical decision support tool demonstrated substantial potential in aiding radiologists with accurate and efficient tumor diagnosis.

Conclusion:-

The results validate the effectiveness of advanced image-processing and deep learning-techniques in accurately detecting brain metastases. The study's findings suggest that integrating AI-driven models into clinical workflows can enhance diagnostic precision, reduce workload for radiologists, and ultimately improve patient outcomes. Future work will focus on expanding dataset diversity, incorporating multimodal imaging techniques, and further refining the model for real-time clinical deployment.

References:-

1. Tong, Elizabeth, Kassie Lyn McCullagh, and Michael Iv. "Advanced imaging of brain metastases: from augmenting visualization and improving diagnosis to evaluating treatment response." *Frontiers in Neurology* 11 (2020): 270.
2. Shukla, Shreya, Aashna Karbhari, Shivam Rastogi, Ujjwal Agarwal, Pranjal Rai, and Abhishek Mahajan. "Bench to Bedside Imaging in Brain Metastases: A Road to Precision Oncology." *Clinical Radiology* (2024).
3. Grøvik, Endre, Darvin Yi, Michael Iv, Elizabeth Tong, Daniel Rubin, and Greg Zaharchuk. "Deep learning enables automatic detection and segmentation of brain metastases on multisequence MRI." *Journal of Magnetic Resonance Imaging* 51, no. 1 (2020): 175-182.
4. Fink, Kathleen R., and James R. Fink. "Imaging of brain metastases." *Surgical neurology international* 4, no. Suppl 4 (2013): S209.
5. Obuchowicz, Rafał, Michał Strzelecki, and Adam Piórkowski. "Clinical applications of artificial intelligence in medical imaging and image processing—A review." *Cancers* 16, no. 10 (2024): 1870.
6. Gultekin, Mehmet Ali, Abdusselim Adil Peker, Ayse Betul Oktay, Haci Mehmet Turk, Dilek Hacer Cesme, Abdallah TM Shbair, Temel Fatih Yilmaz et al. "Differentiation of lung and breast cancer brain metastases: Comparison of texture analysis and deep convolutional neural networks." *Journal of Clinical Ultrasound* 51, no. 9 (2023): 1579-1586.
7. Mehrabian, Hatef, Jay Detsky, Hany Soliman, Arjun Sahgal, and Greg J. Stanisz. "Advanced magnetic resonance imaging techniques in management of brain metastases." *Frontiers in oncology* 9 (2019): 440.
8. Chakrabarty, N., A. Mahajan, V. Patil, V. Noronha, and K. Prabhash. "Imaging of brain metastasis in non-small-cell lung cancer: indications, protocols, diagnosis, post-therapy imaging, and implications regarding management." *Clinical Radiology* 78, no. 3 (2023): 175-186.